

09-12-00

EL111015785US

A

Express Mail Label No.

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
Q00-1032-US1

Total Pages in this Submission

**TO THE ASSISTANT COMMISSIONER FOR PATENTS**

Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**Coherent Phase Data Segment Layout in Data Storage Systems**

and invented by:

**Donald Adams, Tain-Shain Lee, and Ahmed Al-Mehdi**

**If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:**

☐ Continuation    ☐ Divisional    ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation    ☐ Divisional    ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation    ☐ Divisional    ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 53 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications *(if applicable)*
  - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
  - d. ☐ Reference to Microfiche Appendix *(if applicable)*
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings *(if drawings filed)*
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
Q00-1032-US1

Total Pages in this Submission

## Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☐ Formal Number of Sheets \_\_\_\_\_
- b. ☒ Informal Number of Sheets 14
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing

☐ First Class ☒ Express Mail (Specify Label No.): EL111015785US

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
Q00-1032-US1

Total Pages in this Submission

## Accompanying Application Parts (Continued)


15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Additional Enclosures (please identify below):

## Fee Calculation and Transmittal

### CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	72	- 20 =	52	x \$18.00	\$936.00
Indep. Claims	4	- 3 =	1	x \$78.00	\$78.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,704.00

- ☐ A check in the amount of \_\_\_\_\_ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 50-0283 as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of \$1,704.00 as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

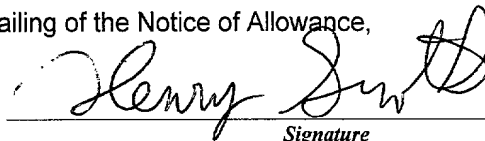  
Signature

Henry Groth, 39,696  
Quantum Corporation, Patent Department, Building 6  
500 McCarthy Boulevard, Milpitas, CA 95035  
voice 408-894-5425, fax 408-232-6581  
email henry.groth@quantum.com

Dated: September 11, 2000

CC:

**CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)**Applicant(s): **DONALD ADAMS ET AL.**

Docket No.

**Q00-1032-US1**

Serial No.

**NOT ASSIGNED**

Filing Date

**SEPTEMBER 11, 2000**

Examiner

**NOT ASSIGNED**

Group Art Unit

**NOT ASSIGNED**Invention: **COHERENT PHASE DATA SEGMENT LAYOUT IN DATA STORAGE SYSTEMS**

I hereby certify that the following correspondence:

**NEW APPLICATION***(Identify type of correspondence)*

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on

**SEPTEMBER 11, 2000***(Date)***CHARLOTTE BOWERS***(Typed or Printed Name of Person Mailing Correspondence)**(Signature of Person Mailing Correspondence)***EL111015785US***("Express Mail" Mailing Label Number)***Note: Each paper must have its own certificate of mailing.**

**Coherent Phase Data Segment Layout in Data Storage Systems**

**By**

**Don Adams**

**Tain-Shain Lee**

**and**

**Ahmed Al-Mehdi**

**Field of the Invention**

The present invention relates to organization of data in data storage systems, and more particularly, to organization of audio/video data stored in disk drives for uniform data retrieval rate.

**Background of the Invention**

Data storage systems such as disk drives are utilized for data storage and retrieval in a variety of applications. A typical disk drive includes a spindle motor for rotating a data disk, and an actuator for moving a head carrier that supports read/write heads radially across the disk to write data to or read data from concentric data tracks on the disk. Many disk drives include a plurality of disks separated by spacer rings and stacked on a hub attached to the spindle motor, a plurality of read/write heads, and a plurality of head carriers, each head carrier supporting at least one read/write head.

To access a data segment starting on a track, in a seek operation the head is moved radially across the tracks to the desired track where the data segment starts. Thereafter, the rotation of the disk rotates the data segment on the track under the head for writing data to or reading data therefrom. The data segment can continue onto one or more other tracks, wherein the head is sequentially moved to subsequent tracks for accessing the remainder of the data segment. The response time of the disk drive in

1 accessing a data segment includes the sum of three time periods: (1) the time period  
2 for the actuator to move the head to the desired track (seek time), (2) the time period  
3 for the start of the data segment to rotate under the head (rotation time or rotational  
4 latency), and (3) the time period for recording or retrieving the entire data segment  
5 (transfer time). The sum of the seek time and the rotational latency is also known as  
6 access time.

7  
8 A data rate, or throughput, in a disk drive with conventional data layout, is  
9 determined as the ratio of the transfer time for the data in a selected data segment and  
10 the response time for the data segment. For a randomly selected data segment, as in a  
11 fragmented disk drive, the data rate for different data segments is random. FIG. 1  
12 illustrates conventional layout of Logical Block Addresses (LBA) in a disk drive disk  
13 space for maximizing forward sequential throughput. The layout is optimized for data  
14 disk drives utilized for data storage in computer systems and maximizes forward  
15 sequential throughput. Each data segment DS comprises two tracks TK shown in a  
16 linear fashion. The advancing phase between sequential tracks TK as the disk rotates  
17 is selected as a rational combination of the number of sectors or LBAs per track, X.  
18 The number X is used as a modulus with a factor chosen so that the rotational time  
19 associated with the phase advance (skew), is just greater than the time for the actuator  
20 to move the head from track to track. The head movement can be either across the  
21 surface of a disk or between heads to different disk surfaces.

22  
23 Such conventional layouts usually result in good performance for disk drives  
24 utilized in computer applications as measured by various well known benchmark  
25 programs. However, a disadvantage of such layouts is the poor performance of the  
26 disk drive when used for storing Audio Visual (AV) content. For example, the disk drive  
27 response time when moving sequentially backward through the content (as for reverse  
28 play or reverse search) is significantly higher than when moving forward through the

1 content. This is because as shown in FIG. 1, the starting and ending phase of any data  
2 segment DS, and accordingly its rotational phase relative to other data segments, is  
3 different according to its track. For a randomly selected data segment DS, the  
4 rotational phase or time to the next randomly selected data segment DS is a random  
5 variable. The phase difference (rotational phase) between the data segments is  
6 incoherent. As such, when moving the head from one data segment to another data  
7 segment, especially when serving more than one AV stream, a wide range of rotational  
8 phases and rotate times are encountered and the averages and maximum response  
9 times are adversely affected.

10  
11 Further, in conventional disk drives, the seek time and the rotational latency are  
12 treated separately, though access time is more important for any application than the  
13 individual time periods. The seek time and rotational latency are combined by default  
14 through a computer file system and a default access time results for a particular system  
15 and application. Therefore, the seek time and the rotational latency are not utilized in  
16 combination for efficient operation of the disk drive in reducing access time. As such in  
17 many systems, a seek control system moves the head to a target track as fast as  
18 possible and then on average waits one half a revolution for the data to rotate under the  
19 head ("hurry up and wait"). Fast movements of the head result in unwanted acoustic  
20 noise, and lead to high power consumption.

21  
22 In some disk drives an attempt has been made to overcome the above problems  
23 by engineering the file system. However, the disk drive designer has incomplete  
24 knowledge of the physical layout of the data disk, and such knowledge can quickly  
25 become obsolete. As a result, the disk drives are overdesigned as described above,  
26 with resulting cost penalties. Still other attempts have been made to overcome the  
27 rotational latency and seek time disconnect. One such attempt is seek reordering  
28 wherein the order of requests to the disk are reordered to minimize the access time

1 over several such requests. Though this method can be effective in disk drives utilized  
2 in computer systems for computer applications, it is quite ineffective for support of  
3 multiple AV streams. This is because the isochronous nature of AV streams makes  
4 order of requests for multiple AV streams important. As such, changing the order of  
5 requests results in failure to record or retrieve the correct AV data at the correct time.  
6

7 There is, therefore, a need for a system and method for improving the systematic  
8 reliability of response time and consequently the sustained throughput of disk drives.  
9 There is also a need for such a system and method to allow for improvement in  
10 managing seek acoustic noise.  
11

### 12 **Summary of the Invention**

13 The present invention satisfies these needs. In one embodiment the present  
14 invention provides a method and data layout/pattern for organizing and allotting disk  
15 drive capacity in a data storage system including data storage media having at least  
16 one recording surface. A method for storing at least one set of data segments to said  
17 recording surface in concentric data tracks includes the steps recording each data  
18 segment onto said recording surface such that each stored data segment has a start,  
19 an end and a rotational phase from that data segment to each of the respective ones of  
20 all other data segments, wherein the data segments are recorded with coherent relative  
21 rotational phases. The coherent phase layout provides substantially constant data  
22 transfer rate to/from the storage media because the relative rotational phase or  
23 rotational time from one data segment to another data segment is deterministic.  
24

25 The relative rotational phases are predetermined, and each relative rotational  
26 phase can have one of a limited number of predetermined values. In one version, the  
27 relative rotational phases from each data segment to respective ones of a first subset of  
28 the data segments in the set have one of said predetermined values, and the relative



1 rotational phase from that data segment to respective ones of a second subset of the  
2 data segments in the set have another of said predetermined values. Each data  
3 segment can include one or more tracks, and data tracks in that data segment can be  
4 offset by a predetermined skew angle. Alternatively, each track can include one more  
5 data segments.

6  
7 In one version, one or more incoming data streams are received and partitioned  
8 into data segments for storage in coherent phase. The data segments are recorded so  
9 as to obtain a nearly constant data storage transfer rate when reading the data from the  
10 data storage media. The data segments read from the storage media are combined to  
11 reformulate one or more data streams from the data segments. In one embodiment of  
12 the present invention, the data storage system is a component of a computer system.  
13 In another embodiment, the data storage system can be a component of an audio video  
14 storage server. In that case, the data segments comprise audio visual data and the  
15 method of the present invention is used to store and retrieve isochronous Audio-Video  
16 (AV) content for consumer electronics applications.

17  
18 The present invention further provides a seek profile for disk drive including a  
19 transducer radially moveable relative to the tracks on a disk by an actuator controlled by  
20 a servo circuit during a seek operation from a starting segment to a destination  
21 segment. Data is stored on the disk in segments with the coherent phase layout.  
22 Performing a seek operation from a starting segment to a destination segment includes  
23 obtaining a seek profile for controlled application of current to the actuator based on the  
24 seek profile, wherein the seek profile includes constraints for the seek operation as a  
25 function of: (1) a seek distance representing the radial distance between the starting  
26 and destination segments, and (2) a seek time based at least on the relative rotational  
27 phase between the starting and destination segments. Current is then applied to the  
28 actuator as a function of said constraints to perform the seek operation. In one version,

1 each seek operation is completed at the expiration of the respective seek time, and for  
2 at least one set of seek distances, the respective seek times are predetermined.  
3 Further, the seek time between two data segments can be based on the relative  
4 rotational time between the data segments, wherein regardless of the seek distance  
5 between the two data segments, the seek operation need only be completed at the end  
6 of the respective seek time, not before. As such, in one version, wherein a set of data  
7 segments have the same inter-segment rotational time (or relative rotational phase), the  
8 seek time for each seek operation among two data segments in the set is the same,  
9 and preferably equal to said inter- segment rotational time. The actuator need only  
10 move the transducer as fast as needed to cover the seek distance by the end of the  
11 seek time, and not before. Therefore, for short seek distances in relation to long seek  
12 distances, the actuator moves the transducer at a lower velocity than for long seek  
13 distances, to cover the seek distance at the end of the seek time. This reduces seek  
14 acoustic noise.

15  
16 The present invention improves the systematic reliability of response time and  
17 consequently the sustained data rate or throughput, taking into account the electro-  
18 mechanical nature of a disk drive. At the same time the present invention preserves  
19 the random access nature of a disk drive, and the new benefits derived therefrom for  
20 the storage of AV content. Additionally, the present invention allows for significant  
21 improvement in managing seek acoustic noise.

### 22 23 **Brief Description of the Drawings**

24 These and other features, aspects and advantages of the present invention will  
25 become better understood with regard to the following description, appended claims  
26 and accompanying drawings where:

27 FIG. 1 shows a conventional disk track layout for a disk drive;

28 FIG. 2 shows an example computer system including a disk drive with a data

1 pattern layout according to one aspect of the present invention;

2 FIG. 3 depicts a top plan view of a disk drive head and disk assembly (HDA) and  
3 a block diagram of disk drive electronics of the disk drive of FIG. 2 that implement and  
4 utilize principles of the present invention;

5 FIG. 4 shows a block diagram of the architecture of an embodiment of the drive  
6 electronics of the disk drive of FIG. 2;

7 FIG. 5 shows an embodiment of data pattern layout in a linear fashion for the  
8 disk drive according to the present invention;

9 FIG. 6A shows an embodiment of data pattern layout of FIG. 5 in concentric  
10 tracks according to the present invention;

11 FIG. 6B shows an embodiment of data pattern layout in different recording  
12 zones;

13 FIG. 7A shows a functional diagram of an aspect of the servo controller of FIG. 4  
14 operating from seek and transducer motion information in seeking operations;

15 FIG. 7B shows an example flow diagram of an embodiment of steps for  
16 performing seek operations according to the present invention;

17 FIG. 8A shows example performance values for a disk drive according to the  
18 present invention;

19 FIG. 8B shows a plot of performance indicia for a disk drive according to the  
20 present invention;

21 FIG. 9 shows an example block diagram of an AV storage server and AV  
22 system according to another aspect of the present invention;

23 FIG. 10 shows a flow diagram of an embodiment of a process for storing data in  
24 a disk drive according to the present invention;

25 FIG. 11 shows a flow diagram of an embodiment of a process for retrieving data  
26 in a disk drive according to the present invention;

27 FIG. 12A shows another embodiment of a data pattern layout in a linear fashion,  
28 according to the present invention, wherein each data segment is one-half track in size;

1 and

2 FIG. 12B shows another embodiment of a data pattern layout in a linear fashion,  
3 according to the present invention, wherein each data segment is one-third track in  
4 size.

5  
6 To facilitate understanding, identical reference numerals have been used, where  
7 possible, to designate identical elements that are common throughout the figures.

### 8 9 Detailed Description of the Invention

10 FIG. 2 shows a block diagram of an example computer system 10 in which a  
11 method embodying aspects of the present invention can be implemented. The  
12 computer system 10 includes a central processing unit ("CPU") 14, a main memory 16,  
13 and I/O bus adapter 18, all interconnected via a system bus 20. Coupled to the I/O bus  
14 adapter 18 is an I/O bus 22 that can comprise e.g. a small computer system  
15 interconnect (e.g., SCSI, ATA (IDE), 1394, etc.) bus, and which supports various  
16 peripheral devices 24 including a storage device/unit such as a disk drive 25. The disk  
17 drive 25 includes drive electronics 26 and a head disk assembly 28 ("HDA"). The  
18 computer system 10 can further comprise a network interface device 30 connected to  
19 the bus 20 for data communication between the computer system 10 and other  
20 computer systems 32 via a network link 34 in a networked data processing system 36.

21  
22 FIG. 3 depicts a top plan view of the HDA 28 and the drive electronics 26 of the  
23 disk drive 25, incorporating principles and aspects of the present invention therein. The  
24 HDA 28 includes a rotatable magnetic storage disk 38, a DC brushless in-hub spindle  
25 motor (not specifically shown), a hub 40 containing and/or enclosing the spindle motor  
26 and spindle bearings, a rotary voice coil actuator assembly 42, a read preamplifier/head  
27 select/write driver circuit 44 connected to the rotary actuator by a flex circuit 46 enabling  
28 the HDA 28 to be connected to the disk drive electronics 26 mounted to the HDA 28

1 externally of the interior thereof, and a base housing 50 to which the various  
2 components of the disk drive are mounted and aligned.

3  
4 Typically, the storage disk 38 is coated with a magnetic material that stores data  
5 in the form of longitudinal bipolar magnetic patterns written by digital saturation  
6 recording techniques within each concentric data track. For simplicity, the following  
7 discussion mentions only a single storage disk 35 in the disk drive 25. However, as  
8 those skilled in the art will recognize from the following discussion, the present invention  
9 is capable of use in disk drives having multiple disks mounted upon the spindle hub 40,  
10 the number of disks 38 and associated data transducer heads affecting the vertical  
11 height of the disk drive.

12  
13 The actuator assembly 42 conventionally comprises a transducer head gimbal  
14 assembly 52 for each disk data surface, a carriage assembly 54, and a rotary voice coil  
15 actuator motor (VCM) 56. In the rotary-type actuator assembly 42, the transducer head  
16 gimbal assembly 52 is attached to an outer end 58 of the carriage 54, while the actuator  
17 motor voice coil 56 is attached at a hub end 60 of the carriage 54. Centrally located  
18 along the carriage is a pivot 62 about which the actuator assembly rotates on a dual  
19 bearing assembly secured to the base housing 50. The pivot 62 is located adjacent the  
20 storage disk 38 such that the carriage 54 extends the upper and lower transducer head  
21 gimbal assemblies 52 over the surfaces of the storage disk 38. Consequently, selective  
22 activation of the actuator voice coil motor (VCM) 56, rotates the actuator assembly 42  
23 about the pivot 62 and accurately positions each transducer assembly 52 over the  
24 surface of the storage disk 38. As such, data can be written to, and can be read from,  
25 each data storage surface of the storage disk 38 by transducers within the transducer  
26 assembly 52.

27  
28 Typically, the transducer assembly 52 includes a dual head transducer assembly

1 64 including e.g. a thin film inductive write head and a shielded magnetoresistive thin  
2 film read element (not shown). The dual head transducer assembly 64 is formed at an  
3 outer end of one rail of e.g. a two rail aerodynamic slider 70, as shown for example in  
4 FIG. 3. In accordance with conventional practice, the magnetoresistive (MR) read  
5 element is formed on the slider first, in order to take advantage of the smoothness of  
6 the finished slider end surface. After the MR read element is formed, the thin film  
7 inductive element is formed over the MR read element.

8  
9 A flexure assembly 72 includes a gimbal secured to the slider and to a load  
10 beam. The load beam provides a preloading gram force to the slider to bias it toward  
11 the facing disks storage surface. The flexure assembly 72 connects at one end to the  
12 carriage; another end supports a slider 70 and the read/write elements over the disk  
13 surface. When the storage disk 38 is not rotating, the slider 70 and transducer  
14 assembly 64 rest upon a radially inward landing zone of the disk surface. On the other  
15 hand, when the storage disk 38 is rotating, the slider 70 overcomes the load beam  
16 spring bias and "flies" several microinches above the disk surface on an "air bearing" in  
17 accordance with what is known in the art as Winchester technology.

18  
19 During flight, the actuator assembly 42 positions the transducers in the  
20 transducer assembly 64 over the multiplicity of concentric data tracks 74 and data  
21 segments DS defined on one, or the oppositely facing, storage surface of the storage  
22 disk 38 so as to read servo and user data and to write user data. However, when the  
23 disk drive 25 is deactivated, the sliders 70 are moved in unison by the carriage  
24 assembly 54 to the inner landing zone and "parked" such that they will not damage the  
25 surface of the disk 38 by coming into contact with it.

26  
27 The disk drive preamplifier/write driver circuit 44 is connected, via a flex circuit  
28 78, to the actuator assembly 42 so that electrical signals may reach the head

1 transducer assemblies 64 via minute wires carried along the side of the carriage 54 and  
2 load beam. The signals leaving and entering the HDA 28 via the flex cable 46 are  
3 utilized by a drive microcontroller 80 and other electronics including a motors control  
4 driver ASIC 82 which supplies driving signals to operate the spindle motor and the  
5 rotary actuator, a PRML read/write channel 44 which receives and decodes coded data  
6 from the disk and which encodes and delivers coded data to the write driver portion of  
7 the IC 44.

8  
9 A disk drive electronics ASIC 84 implements a SERDES/ENDEC function, and  
10 ECC function, a data sequencer, a memory controller, a bus level interface, and a  
11 microprocessor interface for interfacing the microprocessor 80 with other circuits  
12 including a DRAM buffer 86 which can include microprocessor program instructions,  
13 seek profiles, data blocks being transferred between a host (not shown) and the data  
14 storage disk 38, etc.. The microprocessor 80 implements a servo loop for controlling  
15 positioning (following, seeking, etc.) of the rotary actuator 42. In one example, the  
16 memory 86 includes program instructions for execution by the microprocessor 80 to  
17 implement the servo loop.

18  
19 During track settling and following operations, the servo loop receives actual  
20 position samples from position information within embedded servo wedges via the read  
21 element, and separately estimates head position, velocity and actuator bias force in  
22 order to generate and put out a control command value via the motors control ASIC 82  
23 to control head position. During each seek operation from a starting track/segment to a  
24 destination track/segment, the servo loop utilizes a seek profile in conjunction with head  
25 motion information (e.g., position, velocity, etc.) to determine the control command  
26 value for moving the transducers from the starting track/segment to the destination  
27 track/segment. An internal data, address, control bus structure 88 interconnects the  
28 microprocessor 80, motors control ASIC 82, PRML read/write channel ASIC 44, disk

1 drive electronics ASIC 84 and DRAM buffer chip 86. A connection to the host  
2 computing equipment is provided by a drive interface bus 90.

3  
4 Referring to FIG. 4 in conjunction with FIG. 2, in another embodiment, the drive  
5 electronics 26 of FIG. 4 is shown to include a data controller 92 interconnected to a  
6 servo controller 94 via bus 96, and a read/write channel 98 interconnected to the data  
7 controller 92 via a data buffer bus 100. Actual positioning information from data disks  
8 are induced into the transducers, converted from analog signals to digital data in the  
9 read/write channel 98, and transferred to the servo controller 94, wherein in a servo  
10 loop the servo controller 94 utilizes the head positioning information for performing  
11 seeking and tracking/following operations of transducers over the disk tracks 74. In one  
12 example, the servo controller can include the microprocessor 80 of FIG. 3, for executing  
13 program instruction to implement the servo loop.

14  
15 A typical data transfer initiated by the CPU 14 to the disk drive 25 may involve for  
16 example a direct memory access ("DMA") transfer of digital data from the memory 16  
17 onto the system bus 20 (FIGS. 2 and 4). Data from the system bus 20 are transferred  
18 by the I/O adapter 18 onto the I/O bus 22. The data are read from the I/O bus 22 by  
19 the data controller 92, which formats the data into data blocks with the appropriate  
20 header information and transfers the data to the read/write channel 98. For example,  
21 the data controller 92 collects data into data blocks or segments and appends Error  
22 Detection and Correction bits to the blocks. These blocks are further collected into a  
23 service unit which is then passed to the read/write channel 98. Concurrently, a  
24 command is issued to the servo controller 94 to cause the actuator 42 to move the  
25 actuator assembly 64 to the appropriate cylinder. One or more of said function can be  
26 implemented external to the disk drive as a software driver running in a host processor  
27 (e.g., CPU 14), such as for simple ATA disk drives. The read/write channel 98 operates  
28 to convert data between the digital form used by the data controller 92 and the analog



1 form suitable for writing to data disks by transducers in the HDA 28.

2  
3 For a typical request for transfer of data from the HDA 28 to the CPU 14, the  
4 data controller 92 provides a disk track/segment location to the servo controller 94  
5 where the requested data is stored. In a seek operation, the servo controller 94  
6 provides control signals to the HDA 28 for commanding the actuator 42 to position the  
7 transducer assembly 64 and transducers therein over said disk track/segment for  
8 reading the requested data therefrom. The read/write channel 98 converts the analog  
9 data signals from the transducers into digital data and transfers the data to the data  
10 controller 92. The data controller 92 places the digital data on the I/O bus 22, wherein  
11 the I/O adapter 18 reads the data from the I/O bus 22 and transfers the data to the  
12 memory 16 via the system bus 20 for access by the CPU 14.

13  
14 Referring FIG. 5, in one embodiment of the present invention, each surface of a  
15 disk 38 carries a multiplicity of spaced apart concentric tracks 74. Each track 74 is  
16 divided into an equal number of circumferential divisions. These divisions are generally  
17 arced along the disk radius in accordance with an arc defined by the head and the  
18 rotary actuator. Each division begins with a servo sector or "wedge" and is followed by  
19 a user data sector. The head position servo information is included in each servo  
20 wedge and the user data is recorded in each data sector. Because the servo  
21 information is included on the data surface, the servo sectors are said to be  
22 "embedded" in that they lie interspersed among the data sectors. Each servo wedge  
23 contains information used for accurate positioning of the transducers over each  
24 selected data track, so that user data may be written to, or read from, an adjacent data  
25 sector.

26  
27 As shown in FIG. 5, in one embodiment of the present invention data segments  
28 DS including user data are stored on the disk 38, wherein each data segment DS

comprises one or more tracks 74. FIG. 5 shows an example track layout on the disk 38 in a linear fashion, wherein the data segments DS have coherent phase. As such, each data segment DS has a start "S", an end "E" and a relative rotational phase "R" relative to other data segments DS. Each data segment DS has a predetermined rotational phase to another data segment DS. For each data segment DS, the rotational phase R from that data segment DS (e.g., end of the data segment) to each of the other data segments DS is predetermined, and can be selected from a limited range of values. As such, if a set of data segments includes ten data segments, each data segment DS has a distinct, but no necessarily different in value, predetermined rotational phase R relative to each of the other nine data segments in the same. In that example, two or more of the nine distinct relative rotational phases from said one data segment to the other nine data segments in the set can have the same predetermined value (e.g., FIG. 5). Further, different subsets of the nine rotational phases can have different predetermined values (e.g., FIGS. 12A-B).

A phase difference between the start of a data segment DS and the start of another data segment DS is defined as a relative start phase (e.g., 0 in FIG. 5), and a phase difference between the end of a data segment and the end of another data segment is defined as a relative end phase (e.g., 0 in FIG. 5). In one layout version, the relative rotational phase of any data segment to any other data segment DS is independent of the start or end tracks of the data segments DS. Similarly, the relative start phase for any data segment DS is predetermined, and the relative end phase for any data segment DS is also predetermined, independent of the start or end tracks of the data segment DS.

In the example layout shown in FIG. 5, the start of each data segment DS is defined as 0, and the end of each data segment DS is defined as  $360 + (N-1)\alpha$ , where N is the number of tracks 74 in a data segment DS and  $\alpha$  is the skew angle between

1 tracks within a Data segment DS. The rotational phase distance R from the end of a  
 2 data segment DS to the start of any subsequent data segment DS, adjacent or  
 3 otherwise, is predetermined and the same (e.g.,  $R=360-(N-1)\times\alpha$ ). As such, the rotation  
 4 time period from the end of a data segment DS to start of any subsequent data  
 5 segment DS (inter-segment rotational time) is predetermined and the same. The skew  
 6 angle  $\alpha$  is selected to be greater than or equal to track-to-track seek time (e.g., between  
 7 about  $0.2\times 360$  to about  $0.3\times 360$  degrees). The skew angle  $\alpha$  can be adjusted to refine  
 8 average and worst case response times. In FIG. 5, for the data segment DS, the starts  
 9 are the same and constant (i.e., 0 degrees), the ends are the same and constant (i.e.,  
 10  $360+\alpha$  degrees), the relative start and end phases are the same and constant (i.e., 0  
 11 degrees), and the relative rotational phased R are the same and constant (i.e.,  $360-$   
 12  $\alpha$  degrees).

13  
 14 The rotational phase R can be adjusted to allow skew angle between tracks for  
 15 a given number of tracks per data segment DS to improve the average response time  
 16 for a randomly selected data segment DS. Preferably, the skew between tracks within  
 17 a data segment (e.g., the rotational angle between start of tracks, or the resulting track-  
 18 to-track seek time -- track head switch time) is selected to be just greater than the  
 19 maximum time for the actuator to move the head the distance of one track.

20  
 21 FIG. 6A shows another diagram of example track layout of FIG. 5, and FIG. 6B  
 22 shows an embodiment of data pattern layouts in different recording zones 91, described  
 23 further below. Referring to FIGS. 5 and 6A, data segment DS0 comprising tracks TK0,  
 24 TK1; data segment DS1 comprising tracks TK2, TK3; data segments DS2 comprising  
 25 tracks TK4, TK5; and data segment DS3 comprising tracks TK6, TK7 are shown.  
 26 Tracks TK0, TK2, TK4 and TK6 have the same start and end relative to each other.  
 27 And, tracks TK1, TK3, TK5, and TK7 have the same start and end relative to each  
 28 other. The skew angle between track pairs TK0, TK1 is shown as  $\alpha$ . Similarly, the

1 skew angle between track pairs TK2, TK3; TK4, TK5; and TK6, TK7, is shown as  $\alpha$ . In  
2 this example, for each data segment DS the rotational phase R, or rotational time, to a  
3 subsequent data segment is always the same (i.e.,  $360-\alpha$ ).  
4

5 To provide a substantially constant data transfer rate, a seek profile for the servo  
6 system can be designed according to seek time constraints such that the seek time  
7 between any two data segments in a set of data segments (e.g., data segments in a  
8 recording zone 91) is selected to be a predetermined value. For example, the seek  
9 time can comprise the maximum seek time that is necessary to seek from one data  
10 segment DS to another data segment DS. As such, if for example 10 msec is required  
11 to seek from DS0 to DS1, then seeking from DS1 to DS4 also requires 10 msec. For  
12 short seeks (e.g., DS0 to DS1) compared to long seeks (e.g., DS0 to DS11), the  
13 servo system can take the entire 10 msec for the seek operation and move the head  
14 slower by inputting less power into the actuator (thereby reducing acoustic noise).  
15 Other predetermined seek times can also be selected to achieve substantially constant  
16 data transfer rate to and from the disk.  
17

18 When the seek performance requirement is so selected, the seek noise can  
19 accordingly be reduced significantly. This is a highly valuable attribute for hard disk  
20 drives in A/V systems and A/V applications. For example, seek acoustic noise can be  
21 dramatically reduced by implementing a specification for the seek servo system (seek  
22 profile) according to Table 1 below. Additionally, the cost of seek servo amplifier and  
23 actuator motor can be reduced.

Seek Distance	Seek Time
One track and head switches (for intra-DS moves)	2 msec
Two tracks to two thousand tracks	8 msec
Two thousand one tracks to full stroke	19 msec

Table 1. Example seek servo spec. for coherent data segment layout

In the context of Audio and/or Video data and streams, when the data is organized according to the present invention, the seek performance requirement is systematically relaxed. The average and worst case response times are improved. The reduction of the average and worst case response time is also a benefit of the present invention in cases where e.g. a large number of simultaneous streams are being serviced and/or the content has become fragmented physically.

In one embodiment, as a result of a data segment layout according to the present invention, wherein the rotational phase R (and inter-segment rotational time) from a data segment DS to the start of any subsequent data segment DS is predetermined (e.g., the same, or selected from a limited number of predetermined values, etc.), seeks requiring less time than the inter-segment rotational time need not be completed any faster. As such, the seek time is selected based on the inter-segment rotational time, allowing a larger number of possible seek distances can be completed within an inter-segment rotational time.

An example servo loop implementing predetermined seek times according to the present invention is now described. Referring back to FIG. 4, for each seek operation to transfer data, the data controller 92 provides a destination track/segment DS (in

1 relation to the current position of the head at a starting track/segment DS), to the servo  
2 controller 94 where data is to be transferred to/from a segment DS. The servo  
3 controller 94 provides control signals to the HDA 28 for commanding the actuator 42 to  
4 position the transducer over said destination track/segment DS for transferring data.  
5 For example, for a read operation, the read/write channel 98 converts the analog data  
6 signals from the transducers into digital data and transfers the data to the data  
7 controller 92. The data controller 92 places the digital data on the I/O bus 22, wherein  
8 the I/O adapter 18 (FIG. 2) reads the data from the I/O bus 22 and transfers the data to  
9 the memory 16 via the system bus 20 for access by the CPU 14.

10  
11 In one version, the servo controller 94 implements a servo loop, and uses seek  
12 profiles for performing seek operations. For each seek operation from a starting  
13 track/segment DS to a destination track/segment DS, the servo controller 94 receives  
14 actual position samples from position information within embedded servo wedges via  
15 the read element in the head, then estimates head position and velocity, and uses a  
16 seek profile to generate and put out a control command value  $I_{command}$  to the  
17 actuator VCM to move the transducers from the starting track/segment DS to the  
18 destination track/segment DS.

19  
20 Destination segment DS position data on bus 96 provides coarse positioning  
21 information to the servo controller 94 for specifying a seek distance representing the  
22 radial distance that the actuator 42 must move the transducer from the starting segment  
23 DS (e.g., end of starting segment) to reach the destination segment DS (e.g., start of  
24 destination segment). The seek time comprises a predetermined time period for the  
25 transducer to cross over the tracks between the starting segment DS and the  
26 destination segment DS in the seek distance. The servo controller 94 uses seek  
27 information, including e.g. seek distance, on bus 96 and servo head position  
28 information on line 99 to generate a current value  $I_{COMMAND}$  according to the seek

1 profile, to control supply of input actuator current  $I_a$  to the VCM, resulting in controlled  
2 movement of the actuator assembly 64 such that the seek operation is completed by  
3 the end of the seek time, and preferably not sooner. As such, according to the seek  
4 profile, the servo controller 94 generates the current command value  $I_{command}$  such  
5 that each seek operation is completed at the expiration of the respective predetermined  
6 seek time.

7  
8 For the example layout pattern of FIG. 5, the seek time is selected to be the  
9 relative rotational time (inter-segment rotational time based on relative rotational phase  
10 R) between segments DS. Because in the pattern of FIG. 5 the relative rotational  
11 phase R for all the segments DS is the same, the seek time from each starting segment  
12 DS to any destination segment DS is the same, regardless of the seek distance in  
13 tracks between the starting and destination segments. Seeks requiring less time than  
14 the inter-segment rotational time need not be completed any faster. Accordingly, if for  
15 example 20 msec is required to seek from DS0 to DS2, then seeking from DS1 to DS4  
16 also requires 20 msec. For short seeks (e.g., DS0 to DS1) compared to long seeks  
17 (e.g., DS0 to DS11), according to an example seek profile the servo controller 94 uses  
18 the entire 20 msec for the seek operation and moves the head slower by inputting less  
19 power into the actuator (thereby reducing acoustic noise). As such, according to the  
20 example seek profile, for short seeks the servo controller 94 commands less current  
21 input to the VCM to move the actuator, and for longer seeks, the servo controller  
22 commands more current input to the VCM to move the actuator faster. In either case,  
23 the seek distance is traversed by the transducer such the each seek operation is  
24 completed by the end of the same seek time, and not sooner.

25  
26 The seek profile can include constraints such as feed current values, target  
27 velocity per distance, expected distance to go, etc. for seek operations. In one version  
28 of the servo controller 94, for each seek operation, using the seek distance and the

1 predetermined seek time for the seek operation, the servo controller 94 obtains current  
2 level constraints from the seek profile, to generate the current command for the seek  
3 operation. Then, during the seek operation, the servo controller 94 receives actual  
4 head position information, and compares the actual head position information with the  
5 expected head position information according to the seek profile, and adjusts the  
6 current command value to the actuator 42 as necessary to move the transducers  
7 according to the seek profile, such that the seek is completed by the end of the seek  
8 time, not necessarily sooner.

9  
10 For generating the current command, in one embodiment a feed current value  
11 FC is obtained or calculated by a microcontroller (e.g., microprocessor 80 in FIG. 3) in  
12 the servo controller 94 to provide a base current value, depending upon the seek  
13 distance and seek time. The feed current value FC is an a priori prediction of current  
14 expected to be required to carry out the seek operation to achieve the seek  
15 performance described herein (e.g., Table 1) based on a data layout according to the  
16 present invention. It is based on information which quantify the operating  
17 characteristics, some of which are developed during initialization calibration routines,  
18 and can be stored in memory. The feed current value FC allows more accurate  
19 adherence to a desired seek trajectory. The feed current value FC corresponds to the  
20 actuator current needed to keep the actuator on the idealized trajectory.

21  
22 In this example, fundamentally, a nominal current waveform is preestablished for  
23 each seek distance to be traversed by the expiration of the respective predetermined  
24 seek time (preferably not sooner), wherein the seek time is based e.g. on the relative  
25 rotational phase R (or inter-segment rotation time) between the starting segment DS  
26 (e.g., end of starting segment) and the destination segment DS (e.g., start of  
27 destination segment).



1 In versions where all segments DS in a set of segments have the same relative  
2 rotational phase R (e.g., FIG. 5), the seek time can be the same for all seek distances  
3 between all segments DS in that zone. In versions where the relative rotational phase  
4 between a set of segments DS (e.g., segments in a recording zone 91) has one of  
5 several predetermined values (e.g., FIGS. 12A-B), the seek time can have one or more  
6 predetermined time values based at least on the values of the relative rotational phases  
7 (e.g., seek time can be a linear function of inter-segment rotation time). The seek time  
8 can also be selected to be a maximum, minimum, or combination of said  
9 predetermined time values for all seek distances.

10  
11 FIG. 7A shows an example functional block diagram of an embodiment of the  
12 servo controller 94 including the microcontroller 80 of FIG.3, as configured by process  
13 steps according to the present invention to perform seek operations according to seek  
14 profiles 93, operating from seek and transducer motion information including e.g. actual  
15 head position, transducer velocity, transducer distance to destination segment DS, etc.  
16 in seeking operations. In this example the seek profile 93 includes e.g., a priori feed  
17 current values FC 93A, expected velocity/position reference values 93B, etc. The a  
18 priori feed current values FC for the basic current corresponding to the seek distance  
19 and seek time can also be calculated by the microcontroller 80 based on seek  
20 information which can reside in memory.

21  
22 In one example, the feed current values FC (e.g., current profiles) are stored in  
23 memory as a FC look-up table of entries 93A, wherein each entry includes a current  
24 value FC, indexed by the seek distance and the seek time. Each feed current profile  
25 comprises an a priori prediction of current expected to be required to carry out a seek  
26 operation (e.g., transducer traversing a seek distance) by the end of the respective  
27 seek time, not sooner. In one version of the servo controller 94, for each seek  
28 operation, using the seek distance and the predetermined seek time for the seek

1 operation, the servo controller 94 obtains current level constraints from the seek profile,  
2 to generate the current command for the seek operation. Then, during the seek  
3 operation, the servo controller receives actual head position information, and in a  
4 regulation process 95 compares the actual head position information with expected  
5 head position information 93B (EV) according to the seek profile, and adjusts the  
6 current command value in a regulate FC process 95 as necessary to move the head  
7 according to the seek profile, such that the seek is completed by the end of the seek  
8 time, not necessarily sooner.

9  
10 In another version of the servo controller 94, for each seek operation, using the  
11 seek distance and the predetermined seek time for the seek operation, the servo  
12 controller 94 obtains current level from the seek profile 93, to generate the current  
13 command for the seek operation. Then, during the seek operation, the servo controller  
14 receives actual head motion information, and compares the actual head motion  
15 information with the according to the seek profile, and adjusts the current command  
16 value as necessary to move the head according to the seek profile, such that the seek  
17 is completed by the end of the seek time, not necessarily sooner. For example, the  
18 expected values can include transducer motion constraints such as target velocity,  
19 expected velocity, expected target velocity per distance, expected distance to  
20 destination segment DS, expected transducer position, etc. in a table 93B.

21  
22 In one implementation, an actuator feed current profile FC in table 93A is  
23 predetermined and provides the amount of actuator current per distance from the  
24 destination track. The predetermined look-up table 93B specifies the expected  
25 transducer velocity per distance from the destination track, EV, for each predetermined  
26 seek time. As such, in the regulation process 95, for each detected transducer location,  
27 a detected radial velocity is subtracted from the corresponding expected radial velocity.  
28 The difference is then used to adjust the profile current value for that detected

1 transducer location to provide the feed current values FC such that the seek distance is  
2 traversed by the end of the seek time.

3  
4 FIG. 7B shows an example flow diagram of an embodiment of steps performed  
5 by the servo controller 94 for performing seek operations. The microcontroller 80 in the  
6 servo controller 94 executes program instructions including the regulation process 95.  
7 For a seek operation, the microcontroller 80 obtains the distance between the  
8 transducer location and the destination track/segment (seek distance), and obtains the  
9 seek time for the seek operation (step 101) . In one example, the predetermined seek  
10 time between each pair of segments DS (e.g., identified by unique number or location  
11 on reference disk) in a recording zone is stored in memory. In another example, the  
12 predetermined seek time between each pair of segments DS is obtained based on the  
13 inter-segment rotational time between the two segments DS using the angular location  
14 of the end of the starting segment DS and the angular location of the start of the  
15 destination segment DS on the recording surface (i.e., relative rotational phase R). The  
16 microcontroller 80 then obtains a corresponding FC value from the FC look-up table  
17 93A using the seek distance and the respective predetermined seek time (step 103).

18  
19 The microcontroller 80 used actual head position information, and subtracts  
20 current head position track from the destination segment track to determine a total  
21 number of tracks remaining to be crossed (step 105). The microcontroller 80  
22 calculates the actual radial velocity of the transducer as the number of tracks crossed  
23 over by the transducer in between two sampling intervals (step 109), where a sampling  
24 interval is defined by a servo wedge passing under the transducer head. As such,  
25 during each sampling interval, the transducer location is detected, and the  
26 microcontroller 80 calculates the radial velocity of the transducer by determining a  
27 difference in the number of tracks between: (1) a first transducer location detected  
28 during a present sampling interval, and (2) a second transducer location detected

1 during a preceding sampling interval. The microcontroller 80 determines the track  
2 difference between the two transducer locations to obtain the number of tracks crossed  
3 over by the transducer between the two sampling intervals, providing a measure of the  
4 actual radial velocity of the transducer. The radial velocity can be expressed as tracks  
5 crossed over per sampling interval (e.g., tracks/sample).  
6

7 The actual velocity and distance to go values are applied to address and  
8 compare to an expected trajectory value (e.g., velocity per distance remaining) stored in  
9 the trajectory profile look-up table (e.g. table 93B) in memory (e.g. DRAM 86) (step  
10 111). A ratio value,  $V_r$ , of actual velocity value and the reference velocity value from  
11 said look-up table is calculated (step 113) in order to normalize the difference between  
12 the actual velocity and the reference velocity irrespective of magnitude thereof. The  
13 feed forward waveform value FC corresponds to the actuator current needed to keep  
14 the actuator assembly 64 on the idealized trajectory.  
15

16 The normalized, signed velocity signal  $V_r$  is added to the feed forward value FC  
17 to correct for any deviations from the reference trajectory due to friction, torque  
18 constant variation, etc. (step 115). As such, the normalized error signal  $V_r$  is added to  
19 the priori feed forward value FC which yields a corrected actuator current command  
20 value  $I_{\text{Command}}$ . The process is repeated till the destination track/segment DS is reached  
21 (step 107). Other methods of implementing servo loops to perform the seek operations  
22 based on predetermined seek times according to the present invention are possible,  
23 and contemplated by the present invention. For instance, an example feed current  
24 calculation based on expected velocity is described in the commonly assigned United  
25 States Patent No. 5,005,089, titled "High performance, high capacity micro-Winchester  
26 disk drive", incorporated herein by reference, and can be modified to implement seek  
27 operations according to the predetermined seek times described herein.  
28

According to the present invention, seek profile specification is given by required seek time performance across the tracks on the disk, wherein in one example the seek time is stepped (rather than conventional linear function) with a seek time for 1 track seeks, another seek time for seek distances of 2 to x tracks, another seek time for seek distances greater than x by less than y, etc. (e.g., Table 1). As such, excitation of the electromechanical system of the servo control can be relaxed, making the disk drive quieter. Using a coherent phase data layout pattern according to the present invention. A seek profile is selected to move the transducer from a starting segment to arrive at a track where the destination segment starts, just before the start of the destination segment rotates under the transducer, not sooner.

Preferably, the seek time is substantially equal to the inter-segment rotational time between the end of the starting segment to the start of the destination segment. For example using Table 1 above, to seek from a starting segment to a destination segment, the servo controller 94 determines how far the destination data segment is in tracks (seek distance), and then if the seek distance is within e.g., 2 - 2000 tracks, the transducer can take 8 msec to get to the destination segment (seek time = 8 msec). If the seek distance is more than 2000 tracks, then the seek time is 19 msec. As such, according to one version of the present invention, transducer position information from the read/write channel, the physical layout of the data with coherent phase, and the servo loop using seek times based on inter-segment rotational time, are used together to obtain nearly constant data transfer rate, and operate the disk drive quietly and with reduced power.

A data segment DS can be selected to be the amount of physically contiguous data (e.g., bytes, sectors, tracks, etc.) recorded or retrieved to or from the disk each time the actuator moves the heads 52 (e.g., in a skip-sequential manner). A data segment DS is distinguished from a File Allocation Unit (FAU) used in the context of file

1 systems for computer applications (a data segment DS can include an FAU). The latter  
2 is usually contiguous but much smaller in size than a data segment DS. An FAU is  
3 typically between e.g. 4096 and 8192 bytes (8 to 16 sectors) while a data segment DS  
4 is between e.g. 131 Kbytes (256 sectors) to more than 1 Mbytes (several thousand  
5 sectors or several tracks), or more. Preferably, the size of a data segment DS is  
6 selected by balancing among factors including: (1) preservation of the (forward  
7 sequential) throughput of the disk drive 25, (2) budgeting for error event management,  
8 (3) the size (and cost) of a DRAM cache buffer 86 in the disk drive 25, and (4) retaining  
9 the random access nature of the disk drive 25. An example selection can be two or  
10 more tracks per data segment DS. Generally, though not necessarily, all data  
11 segments DS are of the same size. The data segments can be of different sizes, but  
12 with coherent phase.

13  
14 In one version of the present invention, coherent phase can be forced on data  
15 segments DS with the choice of number of tracks per data segment size. The cache  
16 buffer size can also be adjusted to be larger than may otherwise be needed to take  
17 advantage of random access storage. In disk drives utilizing Variable Frequency  
18 Recording (VFR) (e.g., FIG. 6B), wherein track density varies radially, in recording  
19 zones at the inner most tracks there are  $n$  sectors (blocks) per track and in recording  
20 zones at the outer most tracks there are about  $2n$  sectors per track. Tracks in between  
21 vary substantially piece-wise linearly. Preferably, the number of tracks per data  
22 segment DS is selected to vary linearly by radius. Therefore, a coherent phase data  
23 segment layout according to the present invention for seek time, and worst case  
24 response time or throughput performance, can be adjusted according to the possible  
25 seek distances and times for each VFR location on the disk 38.

26  
27 Advantageously, a coherent phase data segment layout of the present invention  
28 provides the same forward and reverse sequential performance for data segment

access. The substantially identical performance for forward and reverse sequential access is advantageous for AV 'trick-play' features, as for example fast-forward and fast-reverse searching through an AV content object. As such, the present invention affords more consistent response time, and thus data rates, particularly important for fast-reverse searching.

FIG. 8A shows the disk drive performance for various e.g. intra-data segment track skew angle  $\alpha$  selections for data segments DS, and resulting inter-data segment rotational phase R (inter-segment rotational time). FIG. 8B shows a plot of the ratio of inter-segment rotational time on average seek time versus average data rate according to the present invention. This example shows how to optimize the skew time for performance, wherein:

$$\text{skew time} = A \times \text{Trev};$$

$$\text{Trev} = \text{time per revolution};$$

$$A = \text{skew factor} / \text{skew modulus};$$

skew factor comprises the integer number of sectors that are used to set the skew angle or time;

skew modulus comprises the integer number of sectors into which a rotation of the disk is divided;

$$\text{skew angle } \alpha = A \times 360 \text{ degrees};$$

$$\text{Rotation phase} = (1-A) \times 360;$$

Rotation time =  $(1-A) \times \text{Trev}$  -- i.e. the time for the disk to rotate to the start of the next Data segment DS;

$$\text{Rotation on Avg Seek Time} = (\text{Rotation time}) / (\text{Avg seek time});$$

$$\text{Avg Rate} = (\text{data per DS}) / (\text{Avg Seek time} + \text{Rotation time} + \text{time to transfer data});$$

Skew modulus can be less than or equal to the number of servo samples per

1 track because a disk drive system cannot resolve time or phase below that interval. As  
2 such,  $A$  is a rational number between 0 and 1. The skew modulus and the skew factor  
3 are selected for a desired rotational time. Preferable selections provide an inter-  
4 segment Rotational time to the next data segment DS of about the same as the  
5 average seek time for the actuator servo system. This can be used as a guide for  
6 designing data layout and seek profiles for disk drive systems with different parameters  
7 and geometry.

8  
9 Because the present invention offsets many negative aspects of rotational  
10 latency, lower spindle speed disk drives are possible. As discussed herein, access time  
11 is the sum of seek time and rotate time, response time is the sum of access time and  
12 transfer time, and data rate is the ratio of the data transferred to the response time. As  
13 rotate time after seek arrival (rotational latency) is nearly zero due to a data segment  
14 layout according to the present invention, rotate time is effectively offset. Therefore,  
15 slowing the spindle speed (increasing  $T_{rev}$ ) has less impact on the data rate than for  
16 conventional data layouts. Thus, lower speed disk drives can be used to support a  
17 given quality or number of A/V streams. Lower speed disk drives further reduce total  
18 acoustic noise.

19  
20 The present invention improves the average performance of the disk drive 25 as  
21 measured by data rate, response time and access time. Further, the present invention  
22 significantly improves minimum data rates, maximum response time and maximum  
23 access time. These improvements afford more budget for error event management  
24 caused by environmental factors. External disturbances from shock or vibration can  
25 lead to excessive servo position errors or track miss-registration. This can lead to  
26 failure to read or write data on the first attempt. Read/write channel noise or spurious  
27 debris inside the HDA can also lead to such failure. These failures, when they occur,  
28 are referred to as error events and are usually managed by the disk drive in error



1 management events such that data are faithfully reproduced. Error management  
2 consumes time for retry attempts and other remedies. Reducing the systematic time to  
3 service A/V streams/data increases the time for managing error events and thus  
4 improves total data reliability for a given A/V bandwidth requirement. Improving said  
5 budget improves the reliability of disk drives in consumer applications by making them  
6 more fit for such use.

7  
8 In addition, the present invention systematically reduces the need for aggressive  
9 time-optimal seek time performance using seek profiles described herein according to  
10 the present invention. By making this reduction, the seek servo system is redesigned to  
11 take advantage of the rotation time in a systematic manner. In so doing, additional  
12 improvements can be gained in seek acoustic noise reduction from the disk drive. Still  
13 further, demands on the disk drive system chassis design are reduced because seek  
14 reaction forces are reduced (chassis response to seek reaction forces can result in  
15 additional loss of response time performance.) This also makes the total acoustic noise  
16 generated by a disk drive less dependent on the system chassis and enclosure. And  
17 still further, the reduced performance required by the seek servo system allows the use  
18 of lower cost power amplifiers and motors.

19  
20 Additionally, using the coherent phase layout the present invention provides  
21 symmetric forward and reverse sequential data segment DS access response time for  
22 'trick-play' features. And, allows for reducing spindle spin speed with less loss in  
23 average and minimum data rates than compared to conventional layouts such in FIG. 1.  
24 Lower spin speed will further reduce total disk drive acoustic noise and imbalance  
25 reaction forces transmitted through the system chassis that will still further reduce total  
26 acoustic noise. Lower spin speed also allows for a lower total cost disk drive.

27  
28 In addition to use of the disk drive 25 in computer applications, a data segment

1 layout according to the present invention allows the use of the disk drive 25 for storing  
2 and retrieving AV content in e.g. an AV storage server. FIG. 9 shows a block diagram  
3 of an example AV storage server 102 according to the present invention. The AV  
4 storage server includes a controller 104, at least one buffer memory 106 and one or  
5 more storage devices 108 such as disk drives 25. The disk drives 25 can store AV  
6 information for various video titles such as movies. The controller 104 controls the  
7 reading and writing of data to the disk drives 25. AV data read from one or more of the  
8 disk drives 25 can be output from the AV storage server for display on a display 110  
9 connected to the AV storage server 102. Each disk drive 25 can simultaneously or  
10 sequentially provide AV information to one or more AV streams output from the AV  
11 storage server 102. Further, incoming AV data into the AV storage server 102 (e.g.  
12 from a cable or over a network) can be stored onto one or more of the disk drives 25.  
13 Each disk drive 25 can simultaneously or sequentially store AV information from one or  
14 more AV streams incoming into the AV storage server 102.

15  
16 The AV storage server 102 can be a component of an AV system 112 according  
17 to the present invention, wherein the AV system 112 comprises said AV storage 102  
18 including an interface unit 114, a wired communication network 116 and component  
19 boxes 118 such as consumer electronics equipment. The AV system 112 can be a part  
20 of a home network system with connection to external cable or network for receiving AV  
21 information. One or more component boxes 118 can receive AV content from one or  
22 more disk drives 25 in the AV server. AV data is read from the disks 38 in the disk  
23 drives 25 to produce data streams which are transmitted to component boxes 118 or  
24 displays 110 for viewing. Further, one or more component boxes 118 can provide AV  
25 content to one or more disk drives 25 in the AV server 102. The data streams can  
26 comprise sequences of discrete fragments of data which are periodically transmitted in  
27 bursts so that over time a constant stream of data is transmitted. The data stream can  
28 be smoothed out using the buffer memory 106. In one example, each burst of video

1 data can corresponds to about 0.5 to 1.0 second of video for a magnetic disk drive 25.

2  
3 The present invention improves the systematic reliability of response time and  
4 consequently the sustained data rate or throughput, taking into account the electro-  
5 mechanical nature of the disk drives 25. At the same time the present invention  
6 preserves the random access nature of a disk drive, and the new benefits derived  
7 therefrom for the storage of AV content described above.

8  
9 In another aspect the present invention provides a method for storing a stream of  
10 data to the data storage disk so as to obtain a nearly constant data storage transfer rate  
11 when reading the data from the data storage disk. FIGS. 10-11 show example  
12 flowcharts of processes for implementing an embodiment of the of present invention.  
13 To best understand the processes, the reader should also refer to FIGS. 2-4. In one  
14 implementation, the processes can take the form of computer programs typically  
15 executed by well-known data processing and control electronics including  
16 microprocessors or microcontrollers 80, 14 (e.g., PD787012 microcontroller  
17 manufactured by NEC). In one example, the computer programs can be executed by  
18 the microcontrollers 80 or 92 in response to data storage and retrieval commands from  
19 a processor 14. From the depicted flow charts, those skilled in the art can readily select  
20 an appropriate microcontroller and program the selected microcontroller to execute the  
21 disclosed processes.

22  
23 Referring to FIG. 10, in one embodiment, the method of storing a data stream  
24 includes the steps of partitioning incoming data into data segments (step 120); moving  
25 the data segments into a buffer 86 or 16 (step 122); for each data segment: identifying  
26 one or more data tracks on the data storage disk to store a data segment (step 124);  
27 directing the VCM to position the transducer over the identified tracks (step 126); and  
28 recording that data segment in the identified tracks with coherent phase relative to other

1 data segments according to the data segment pattern herein, wherein the start phase  
2 for each data segment is the same, and the end phase for each data segment is the  
3 same (step 128). In one example, steps 120, 122 can be executed by the processor  
4 14, and steps 124, 126 and 128 can be executed by the drive electronics 26 (e.g.,  
5 microprocessor 80 or data controller 92). Other functional division of the computer  
6 program for execution by various processors and microcontrollers in the disk drive 25  
7 and other system processors such as the CPU 14 are also possible and contemplated  
8 by the present invention.

9  
10 As such, in one scenario, a data stream is received by the disk drive 25 as bytes  
11 of data, and segmented into sectors. A set of sectors is grouped into a data segment  
12 by the disk drive electronics chip 84. The data segment is stored into a disk drive buffer  
13 86, and the microprocessor 80 identifies the tracks on the data storage disk 38 to store  
14 the data segment. The servo controller 94 positions the transducer 64 over the  
15 identified tracks, and the data segment is stored onto the tracks according to the  
16 coherent phase data segment pattern/layout herein.

17  
18 In step 128, the data segments can be recorded such that the data tracks in  
19 each data segment are offset by a predetermined skew angle  $\alpha$ . Preferably, the skew  
20 angle is selected to minimize rotational latency as the transducer is positioned over  
21 adjacent tracks within a data segment to write data thereto and later read data  
22 therefrom, in a forward sequential fashion. Due to the coherent phase layout/pattern,  
23 the data segments are recorded so as to obtain a nearly constant data storage transfer  
24 rate when transferring data to/from the storage media (e.g., data disk). In another  
25 embodiment of the present invention, the steps shown in FIG. 10 can be performed,  
26 sequentially or simultaneously, to store multiple data streams onto the data disk drive  
27 25.

1 Referring to FIG. 11, the data segments can be read from the data disk 25 in  
2 response to data segment requests from a processor 14. Upon receiving a request for  
3 a data segment stored on the disk 38 (step 130), the data tracks where the data  
4 segment is stored are identified (step 132); the VCM is directed to position the  
5 transducer over the identified tracks (step 134); and data is read from the identified  
6 tracks into a buffer 86 or 16 to be transmitted to the requester (step 136). The data  
7 segments read from the disk can be combined to reformulate an output one or more  
8 data streams (step 138).

9  
10 As such, in one scenario, the data segments can be read from the disk drive 25  
11 in response to host command(s). The disk drive electronics chip 84 receives the  
12 request for data segment. The microprocessor 80 identifies the location of the data  
13 tracks on the disk media where the data segment resides, and the servo controller 94  
14 positions the transducer 64 over the identified tracks. The data is read, in form of a data  
15 segment, one sector at a time, from the tracks and stored into the disk drive buffer 86.  
16 When a certain amount of data has been stored in the buffer 86, the data is  
17 reformulated and transmitted across the disk drive interface.

18  
19 The steps in FIG. 11 can be performed, sequentially or simultaneously, to read  
20 data segments for multiple data streams from the disk, and reformulate the data  
21 streams for output. In one example, steps 130 and 138 can be executed by the  
22 processor 14, and steps 132, 134 and 136 can be executed by the drive electronics 26  
23 (e.g. microprocessor 80 or data controller 92). Other functional division of the computer  
24 program for execution by various processors and microcontrollers in the disk drive 25  
25 and other system processors such as the CPU 14 are also possible and contemplated  
26 by the present invention. The processes described in relation to FIGS. 10-11 can also  
27 be implemented in the system 102 of FIG. 9.

1 The data/track layout method of the present invention allows organizing and  
2 allocation of disk drive capacity when used to store and retrieve isochronous Audio-  
3 Video (AV) content for consumer electronics applications. The layout model can be  
4 particularly useful when managing multiple AV streams over multiple content objects in  
5 a full and fragmented disk drive. The method is not dependent on any particular  
6 interface, and can be implemented on e.g., ATA, SCSI, 1394, etc.. Using FCP-AV/C  
7 with an on board Stream Manager and Embedded File System can be used with the  
8 method of the present invention e.g. for content objects used for delay broadcast  
9 applications.

10  
11 A coherent phase layout according to the present invention is laid out on the disk  
12 38 such that data can be stored on the disk 38 according to that phase layout (e.g., the  
13 segments have coherent relative rotational phase). Servo information provides track  
14 location and angular position of data on the disk 38, allowing specification of an  
15 address for every sector on the disk, wherein a collection of sectors makes up a  
16 segment DS. Therefore, the servo information provides radial position and angular  
17 position of each segment DS on the disk 38. The start of each track is recorded on the  
18 disk 38 at fabrication, such that when data is later written in segments DS on the disk  
19 38 by the servo system, the data is stored in segments having relative coherent phase.  
20 As such, the coherent phase pattern is an attribute of the fabricated layout pattern on  
21 the disk 38. In one example, the disk 38 of the disk drive 25 is initially formatted with S-  
22 Scan using the coherent phase pattern layout described herein and shown by example  
23 in the drawings. Thereafter, an LBA to physical transformation module in the disk drive  
24 firmware maps data segments according to the coherent phase data segment pattern  
25 herein.

26  
27 According to the present invention, the rotational phase between the end of one  
28 data segment to the start of another data segment, has a limited range of

predetermined possibilities or in a special case it is constant. The servo system in implemented with information representing rotational time from end of one data segment to start of another data segment. According to the present invention, a data segment pattern with coherent phase is laid out on top of data layout, which is on top of the servo format. In conventional data layouts, there is no linkage from the servo system to the data layout, making it impossible to determine rotational time between end of a piece of data to start of another piece of data.

In one example operation, a read/write command is issued and translated into a specific sector or sectors which start at a logical block address. The logical block address is converted (mapped) to a physical location on the disk surface using information including e.g. the size of each data segments, number of tracks per data segment, number of sectors per track, mapping of the defects, track skew angle, etc.. Firmware, or software that controls hardware, uses said information to convert logical block addresses to physical locations based on the coherent phase layout according to the present invention. The disk drive then uses head(s) within the head transducer assembly for writing and reading magnetic patterns on the rotating magnetic storage disk in the physical locations in one or more concentric tracks. A coherent phase segment layout/pattern according to the present invention includes segments DS such that each segment DS has a predetermined rotational phase relative to another segment DS.

For example, said relative rotational phase  $R$  for each data segment in FIG. 5 is the same (i.e.,  $360-\alpha$ ). The predetermined relative rotational phase  $R$  from a data segment to different data segments can be different and selected from a limited number of predetermined values. In the example LBAX and data segment DS layout described herein in relation to FIGS. 5-6, each data segment DS includes two tracks, and has the same relative rotational phase  $R$  (i.e.,  $360-\alpha$ ) to other data segments. However, a data

1 segment DS need not be larger than one track. This is particularly the case as linear  
2 densities for disk drives increase. Further, some applications are limited to less than  
3 one track.

4  
5 For example, when using ATA disk drives, there is a standard limit of 256 sectors  
6 per command, which can be utilized as the size of a data segment DS. Referring to  
7 FIG. 12A, as an example, each data segment DS can be selected to be  $\frac{1}{2}$  track in  
8 length. In that case, there are two different predetermined relative rotational phases for  
9 each data segment DS. Predetermined rotational times (rotational phases R) from  
10 each data segment to another segment can be one of: (1)  $\frac{1}{2}$  a full rotation time ( $R=180$   
11 degrees), or (2) a full rotation time (i.e.,  $R=\text{one revolution or } 360 \text{ degrees}$ ). The track-  
12 to-track seek time or skew angle is not applicable in this case, and the one track and  
13 head switch time are not necessary.

14  
15 As such in the example data segment pattern shown in FIG. 12A, each data  
16 segment has a first relative rotational phase R relative to a first set of data segments,  
17 and a second relative rotational phase R relative to a second set of data segments. For  
18 example, the data segment DS0 has a first relative rotational phase  $R=360$  degrees to  
19 a first set of data segments including data segments DS2, DS4, DS6, etc. And, the  
20 data segment DS0 has a second relative rotational phase  $R=180$  degrees to a second  
21 set of data segments including DS1, DS3, DS5, DS7, etc.. Similarly, the data segment  
22 DS0 has a relative start phase of 180 degrees relative to data segments DS1, DS3,  
23 DS5, etc.. And, the data segment DS0 has a relative end phase of 180 degrees with  
24 relative to data segments DS1, DS3, DS5, etc.. Similarly, the data segment DS0 has a  
25 relative start phase of 0 degrees relative to data segments DS2, DS4, DS6, etc.. And,  
26 the data segment DS0 has a relative end phase of 0 degrees with relative to data  
27 segments DS2, DS4, DS6, etc..



1 Further, all tracks need not have the same number of segments DS because  
2 there can typically be several (e.g., 16) recording zones (e.g., FIG. 6B) that include  
3 different number of sectors per track. As such, the number of segments DS in each  
4 track can vary from zone to zone. For example, the number of different relative start,  
5 end and rotational phases for data segments in each zone can increase from zones at  
6 the inner diameter to the zones at the outer diameter of the disk surface. The number  
7 and values of relative start, end and rotational phases for data segments in each zone  
8 can be selected as described by example herein to obtain one or more of the  
9 advantages of the layout format described herein.

10  
11 As such, each zone includes a set of data segments therein with coherent phase  
12 selected for that set. In FIG. 6B, two of a plurality of recording zones 91 are shown.  
13 The inner recording zone includes an example data pattern layout such as shown in  
14 FIG. 12A wherein each track 74 includes two data segments. The outer recording zone  
15 includes an example pattern layout such as in FIG. 5 including data segments DSi and  
16 DSj where each data segment includes two tracks 74, and further shows start S and  
17 end E of each of the data segments DSi and DSj. Though in FIG. 6B, the layout  
18 patterns in the inner and the outer recording zones are different, in other versions the  
19 layout patterns in the recording zones can be the same wherein: in one case in all  
20 recording zones 91 each data segment DS includes one or more tracks 74, in another  
21 case in all recording zones 91 each track 74 includes two or more data segments DS,  
22 etc..

23  
24 FIG. 12B shows another embodiment of a data pattern layout in a linear fashion,  
25 according to the present invention, wherein each data segment is one-third track in  
26 size. For example, track TKn+2 comprises three data segments DS56, DS57 and  
27 DS58 (track and DS numbers are randomly selected for purposes of example only). In  
28 one version, in a disk with multiple recording zones (e.g., FIG. 6B), a first zone on a

1 recording surface of the disk can include the pattern layout of FIG. 12A and a second  
 2 zone on that recording surface can include the pattern layout of FIG. 12B. Yet in  
 3 another version, where the disk includes multiple recording zones, and each data  
 4 segment DS includes one or more tracks (e.g., FIG. 5), the number of tracks per data  
 5 segment can be different in different recording zones. Further, the present invention  
 6 contemplates a recording surface with different recording zones, wherein in at least one  
 7 recording zone each data segment includes one or more tracks (e.g., FIGS. 12A-B),  
 8 and in at least another recording zone each track includes two or more data segments  
 9 (e.g., FIG. 5).

10  
 11 For pattern layouts such as shown by example in FIGS. 12A-B, where the  
 12 relative rotational phase between segments has one of several predetermined values,  
 13 the seek time for seek operations between segments in each recording zone can have  
 14 one or more predetermined time values based at least on the values of the relative  
 15 rotational phases (e.g., seek time can be a linear function of inter-segment rotation  
 16 time). The seek time can also be selected to be a maximum, minimum, or combination  
 17 of said predetermined time values for all seek distances. For example, for the pattern  
 18 of FIG. 12A, the seek time can comprise the predetermined rotational times from each  
 19 starting data segment to a destination data segment, including: (1) time for  $\frac{1}{2}$  a full disk  
 20 rotation time ( $R=180$  degrees), or (2) time a full disk rotation time (i.e.,  $R=$ one revolution  
 21 or 360 degrees).

22  
 23 The seek time for each seek operation between two segments in FIG. 12A is  
 24 obtained based on the rotational time from the track where the starting data segment  
 25 ends to the track where the destination data segment starts. In one example, the  
 26 predetermined seek time between each pair of segments (e.g., identified by unique  
 27 number or location on reference disk) is stored in memory to access and use by the  
 28 servo loop. For example the servo controller 94 can access a seek time table (stored in

1 memory 86, or within the servo controller 94, or on the disk, etc.) for each recording  
2 zone, wherein each seek time table includes information representing the  
3 predetermined seek time for each pair of data segments in that recording zone. In  
4 another example, the predetermined seek time between each pair of segments is  
5 obtained from the inter-segment rotational time between the two segments based on  
6 e.g. the angular location of the end of the starting segment and the angular location of  
7 the start of the destination segment on the recording surface of the disk.

8  
9        Though in the embodiments described herein a disk drive is used as an example  
10 of a data storage system or data storage device, other examples are possible. For  
11 example, the present invention can be implemented in other data storage devices such  
12 as e.g. CD player, DVD, CD ROM, etc.

13  
14        The present invention has been described in considerable detail with reference  
15 to certain preferred versions thereof; however, other versions are possible. Therefore,  
16 the spirit and scope of the appended claims should not be limited to the description of  
17 the preferred versions contained herein.

**What is claimed is:**

1. In a data storage system including data storage media having at least one rotatable recording surface, a method for storing data segments to said recording surface in concentric data tracks, comprising the steps of:

recording at least one set of data segments onto said recording surface, each recorded data segment including a start, an end and a rotational phase from that data segment to each of the respective ones of all other data segments in the set, wherein the data segments are recorded with coherent relative rotational phases.

2. The method of claim 1, wherein the steps of recording the data segments further includes the steps of recording the data segments such that each data segment further has: (i) a relative start phase from the start of that data segment to the start of each of the respective ones of all other data segments in the set, and (ii) a relative end phase from the end of that data segment to each of the respective ones of all other data segments in the set, wherein the data segments are recorded with coherent relative start phases and coherent relative end phases.

3. The method of claim 2 wherein the step of recording the data segments further includes the steps of recording the data segments such that for each data segment in the set: said relative start, end and rotational phases of that data segment to respective ones of all other data segments in the set are predetermined.

4. The method of claim 2, wherein for each data segment in the set: the rotational phases from that data segment to respective ones of all other data segments in the set comprise the rotational phases from the end of that data segment to the start of the respective ones of all other data segments in the set.

5. The method of claim 4, wherein the step of recording the data segments

1 further includes the steps of recording the data segment such that for each data  
2 segment in the set the rotational phase for that data segment relative to each of the  
3 other data segments in the set has one of a limited number of predetermined values.  
4

5 6. The method of claim 5, wherein the step of recording the data segments further  
6 includes the steps of recording the data segments such that for each data segment in  
7 the set: the relative rotational phases from that data segment to respective ones of a  
8 first subset of the data segments in the set have one of said predetermined values, and  
9 the relative rotational phase from that data segment to respective ones of a second  
10 subset of the data segments in the set have another of said predetermined values.  
11

12 7. The method of claim 4, wherein the step of recording the data segments  
13 further includes the steps of recording the data segments such that for each data  
14 segment in the set the relative rotational phases from that data segment to respective  
15 ones of the other data segments in the set are the same.  
16

17 8. The method of claim 1, wherein each data segment includes one or more  
18 tracks.  
19

20 9. The method of claim 1, wherein the step of recording data segments  
21 further includes the steps of recording each data segment such that data tracks in that  
22 data segment are offset by a predetermined skew angle.  
23

24 10. The method of claim 9, wherein the storage system comprises a disk drive  
25 including said data storage media rotated by a spindle motor, a data transducer  
26 assembly positionable at concentric data track locations on the recording media by an  
27 actuator controlled by a servo circuit, and wherein said predetermined skew angle is  
28 selected to minimize rotational latency as the transducer is positioned over adjacent

1 tracks within a data segment.

2  
3 11. The method of claim 1, wherein the steps of recording the data segments  
4 further includes recording the data segments such that each track includes one or more  
5 data segments.

6  
7 12. The method of claim 11, wherein the step of recording the data segments  
8 further includes the steps of recording the data segments such that for each data  
9 segment in the set the rotational phase from the end of that data segment relative to  
10 the start of each of the other data segments in the set has one of a limited number of  
11 predetermined values.

12  
13 13. The method of claim 11, wherein the step of recording the data segments  
14 further includes the steps of recording the data segments in one or more concentric  
15 recording zones, each recording zone including a plurality of tracks, such that at least in  
16 one recording zone each track includes the same number of segments therein.

17  
18 14. The method of claim 11, wherein the segments are recorded so as to  
19 obtain a nearly constant data storage transfer rate when transferring data to and/or  
20 from the segments.

21  
22 15. The method of claim 1, further comprising the steps of receiving one or  
23 more incoming data streams and partitioning each incoming data stream into data  
24 segments before recording on the media.

25  
26 16. The method of claim 15, wherein the step of partitioning each data stream  
27 further comprises the steps of partitioning that data stream into data segments of equal  
28 size.

1  
2           17.    The method of claim 15, wherein the step of partitioning each data stream  
3 further comprises the steps of partitioning that data stream into data segments, each  
4 data segment including multiple tracks in size.

5  
6           18.    The method of claim 15 further comprising the steps of:  
7                   reading the recorded data segments from the storage media, and  
8                   reformulating said one or more data streams from the read data  
9 segments.

10  
11           19.    The method of claim 1 wherein the step of recording the data segments  
12 further includes recording the data segments on the storage media so as to obtain a  
13 substantially deterministic data transfer rate to and from the data storage media.

14  
15           20.    The method of claim 1, wherein the step of recording the data segments  
16 further includes the steps of recording the data segments such that for each data  
17 segment in the set: said relative rotational phases of that data segment to respective  
18 ones of all the other data segments in the set are predetermined independent of the  
19 start or end track of that data segment.

20  
21           21.    A data storage pattern for storing information on a recording surface of  
22 recording media in a storage system, said pattern including at least one set of  
23 segments for storing user data in concentric data tracks on the recording surface,  
24 wherein each segment includes a start, an end and a rotational phase from that  
25 segment to each of the respective ones of all other segments in the set such that the  
26 segments have coherent relative rotational phases.

27  
28           22.    The pattern of claim 21, wherein each segment further includes: (i) a

1 relative start phase from the start of that segment to the start of each of the respective  
2 ones of all other segments in the set, and (ii) a relative end phase from the end of that  
3 segment to each of the respective ones of all other segments in the set, wherein the  
4 segments have coherent relative start phases and coherent relative end phases.

5  
6 23. The pattern of claim 22 wherein for each segment in the set: said relative  
7 start, end and rotational phases of that segment to respective ones of all other  
8 segments in the set are predetermined.

9  
10 24. The pattern of claim 22, wherein for each segment in the set: the  
11 rotational phases from that segment to respective ones of all other segments in the set  
12 comprise the rotational phases from the end of that segment to the start of the  
13 respective ones of all other segments in the set.

14  
15 25. The pattern of claim 24, wherein for each segment in the set the rotational  
16 phase for that segment relative to each of the other segments in the set has one of a  
17 limited number of predetermined values.

18  
19 26. The pattern of claim 25, wherein for each segment in the set: the relative  
20 rotational phases from that segment to respective ones of a first subset of the  
21 segments in the set have one of said predetermined values, and the relative rotational  
22 phase from that segment to respective ones of a second subset of the segments in the  
23 set have another of said predetermined values.

24  
25 27. The pattern of claim 24, wherein for each segment in the set the relative  
26 rotational phases from that segment to respective ones of the other segments in the set  
27 are the same.



1           28.    The pattern of claim 21, wherein each segment includes one or more  
2 tracks.

3  
4           29.    The pattern of claim 21, wherein data tracks in each segment in the set  
5 are offset by a predetermined skew angle.

6  
7           30.    The pattern of claim 29, wherein the storage system comprises a disk  
8 drive including said data storage media rotated by a spindle motor, a data transducer  
9 assembly positionable at concentric data track locations on the recording media by an  
10 actuator controlled by a servo circuit, and wherein said predetermined skew angle is  
11 selected to minimize rotational latency as the transducer is positioned over adjacent  
12 tracks within a segment.

13  
14           31.    The pattern of claim 21, wherein each track includes one or more  
15 segments.

16  
17           32.    The pattern of claim 31, wherein for each segment in the set the rotational  
18 phase from the end of that segment relative to the start of each of the other segments  
19 in the set has one of a limited number of predetermined values.

20  
21           33.    The pattern of claim 31 further comprising one or more concentric  
22 recording zones, each recording zone including a plurality of tracks, such that at least in  
23 one recording zone each track includes the same number of segments therein.

24  
25           34.    The pattern of claim 31, wherein the segments are recorded so as to  
26 obtain a substantially deterministic data storage transfer rate when transferring data to  
27 and/or from the segments.

1           35.    The pattern of claim 21, wherein for each segment in the set: said relative  
2 rotational phases of that segment to respective ones of all the other segments in the set  
3 are predetermined independent of the start or end track of that data segment.  
4

5           36.    The pattern of claim 21 wherein the segments are recorded so as to  
6 obtain a substantially deterministic data transfer rate to and from the data storage  
7 media.  
8

9           37.    In a storage device including at least one rotatable storage medium  
10 having at least one set of segments for storing data in concentric tracks on the storage  
11 medium, each segment having a start, an end and a rotational phase from that segment  
12 to each of the respective ones of other segments in the set such that the segments  
13 have coherent relative rotational phases, the storage device further including a  
14 transducer radially moveable relative to said tracks by an actuator controlled by a servo  
15 circuit during a seek operation from a starting segment to a destination segment, a  
16 method for performing seek operations comprising the steps of:

17               (a)    receiving a request for a seek from a starting segment to a  
18 destination segment;

19               (b)    obtaining a seek profile for controlled application of current to the  
20 actuator based on the seek profile, wherein the seek profile includes constraints for the  
21 seek operation as a function of: (1) a seek distance representing the radial distance  
22 between the starting and destination segments, and (2) a seek time based at least on  
23 the relative rotational phase between the starting and destination segments; and

24               (c)    applying current to the actuator as a function of said constraints to  
25 perform the seek operation.  
26

27           38.    The method of claim 37, wherein step (b) further includes the steps of:  
28 obtaining a seek profile for each seek operation, the seek profile including

1 constraints as a function of the seek distance and the seek time for that seek operation,  
2 such that: (1) each seek operation is completed at the expiration of the respective seek  
3 time, and (2) for at least one set of seek distances, the respective seek times are  
4 predetermined.

5  
6 39. The method of claim 38, wherein for at least a subset of the segments,  
7 respective inter-segment seek times are the same.

8  
9 40. The method of claim 38, wherein each of said respective seek times has  
10 one of a limited number of predetermined values.

11  
12 41. The method of claim 38, wherein step (b) further comprises the steps of,  
13 for each seek operation, obtaining actuator current level and transducer motion  
14 constraints based on the seek time and the seek distance for that seek operation, and  
15 step (c) further comprises the steps of applying current to the actuator as a function of  
16 at least the current level and the transducer motion constraints to complete the seek  
17 operation at the expiration of the seek time.

18  
19 42. The method of claim 38, wherein the seek time constraint corresponding  
20 to each seek operation is based on the relative rotational phase from the end of the  
21 starting segment to the start of the destination segment for the seek operation.

22  
23 43. The method of claim 38, wherein the seek time constraint corresponding  
24 to each seek operation is based on a rotation time from the end of the starting segment  
25 to the start of the destination segment, wherein the rotation time is a function of the  
26 relative rotational phase from the end of the starting segment to the start of the  
27 destination segment for the seek operation.

1           44.    The method of claim 37, wherein for each segment in the set: said relative  
2 start, end and rotational phases of that segment to respective ones of all other  
3 segments in the set are predetermined.

4  
5           45.    The method of claim 37, wherein for each segment in the set the  
6 rotational phase for that segment relative to each of the other segments in the set has  
7 one of a limited number of predetermined values.

8  
9           46.    The method of claim 45, wherein for each segment in the set: the relative  
10 rotational phases from that segment to respective ones of a first subset of the  
11 segments in the set have one of said predetermined values, and the relative rotational  
12 phase from that segment to respective ones of a second subset of the segments in the  
13 set have another of said predetermined values.

14  
15           47.    The method of claim 37 wherein for each segment in the set the relative  
16 rotational phases from that segment to respective ones of the other segments in the set  
17 are the same.

18  
19           48.    The method of claim 37 wherein each segment includes one or more  
20 tracks.

21  
22           49.    The method of claim 37, wherein each track includes one or more  
23 segments.

24           50.    A data storage device comprising:

25               (a)    recording media having at least a recording surface for storing  
26 information according to a data storage pattern including at least one set of segments  
27 for storing user data in concentric data tracks on the recording surface, wherein each  
28 segment includes a start, an end and a rotational phase from that segment to each of

1 the respective ones of all other segments in the set such that the segments have  
2 coherent relative rotational phases;

3 (b) at least one data transducer assembly for reading and/or writing  
4 data to the recording surface of the media;

5 (c) a servo circuit for controlling an actuator to position the transducer  
6 assembly at segments on the recording surface; and

7 (d) a controller adapted for transferring data to and from said  
8 segments on the recording surface, wherein: (1) during data storing operations in each  
9 segment, the controller controls the transducer via the servo circuit to record data in  
10 that segment, such that data is stored in the segments on the recording surface with  
11 coherent phase, and (2) during data retrieval operations from each segment, the  
12 controller controls the transducer via the servo circuit to retrieve data from each  
13 segment.

14  
15 51. The storage device of claim 50, wherein each segment further includes: (i)  
16 a relative start phase from the start of that segment to the start of each of the  
17 respective ones of all other segments in the set, and (ii) a relative end phase from the  
18 end of that segment to each of the respective ones of all other segments in the set,  
19 wherein the segments have coherent relative start phases and coherent relative end  
20 phases.

21  
22 52. The storage device of claim 51 wherein for each segment in the set: said  
23 relative start, end and rotational phases of that segment to respective ones of all other  
24 segments in the set are predetermined.

25  
26 53. The storage device of claim 51, wherein for each segment in the set the  
27 rotational phase from the end of that segment relative to the start of each of the  
28 respective ones of other segments in the set has one of a limited number of

1 predetermined values.

2  
3 54. The storage device of claim 53, wherein for each segment in the set: the  
4 relative rotational phases from that segment to respective ones of a first subset of the  
5 segments in the set have one of said predetermined values, and the relative rotational  
6 phase from that segment to respective ones of a second subset of the segments in the  
7 set have another of said predetermined values.

8  
9 55. The storage device of claim 53, wherein for each segment in the set the  
10 relative rotational phases from that segment to respective ones of the other segments  
11 in the set are the same.

12  
13 56. The storage device of claim 50, wherein each segment includes one or  
14 more tracks.

15  
16 57. The storage device of claim 56, wherein tracks in each segment in the set  
17 are offset by a predetermined skew angle, wherein said predetermined skew angle is  
18 selected to minimize rotational latency as the transducer is positioned over adjacent  
19 tracks within a segment.

20  
21 58. The storage device of claim 50, wherein each track includes one or more  
22 segments.

23  
24 59. The storage device of claim 58, wherein for each segment in the set the  
25 rotational phase from the end of that segment relative to the start of each of the other  
26 segments in the set has one of a limited number of predetermined values.

27  
28 60. The storage device of claim 58 further comprising one or more concentric

1 recording zones, each recording zone including a plurality of tracks, such that at least in  
2 one recording zone each track includes the same number of segments therein.  
3

4 61. The storage device of claim 50, wherein for each segment in the set: said  
5 relative rotational phases of that segment to respective ones of all the other segments  
6 in the set are predetermined independent of the start or end track of that data segment.  
7

8 62. The storage device of claim 50 wherein the segments are recorded so as  
9 to obtain a substantially deterministic data transfer rate to and from the data storage  
10 media.  
11

12 63. The storage device of claim 50, wherein:

13 (i) the controller includes at least one seek profile, for generating  
14 actuator current commands based on the seek profile to perform at least one seek  
15 operation from a starting segment to a destination segment, the seek profile including  
16 constraints for the seek operation as a function of: (1) a seek distance representing the  
17 radial distance between the starting and destination segments, and (2) a seek time  
18 based at least on the relative rotational phase between the starting and destination  
19 segments; and

20 (ii) the servo circuit include a driver coupled to controller, wherein the  
21 driver receives the at least one current command value to generate an input current to  
22 the actuator as a function of said constraints to perform the seek operation.  
23

24 64. The storage device of claim 53, wherein the seek profile includes  
25 constraints as a function of the seek distance and the seek time for the seek operation,  
26 such that: (1) each seek operation is completed at the expiration of the respective seek  
27 time, and (2) for at least one set of seek distances, the respective seek times are  
28 predetermined.

1  
2           65.    The storage device of claim 54, wherein for at least a subset of the data  
3 segments, respective inter-segment seek times are the same.  
4

5           66.    The storage device of claim 54, wherein each of said respective seek  
6 times has one of a limited number of predetermined values.  
7

8           67.    The storage device of claim 54, wherein, for each seek operation, the  
9 controller further obtains actuator current level and transducer motion constraints based  
10 on the seek time and the seek distance for that seek operation, and the driver applies  
11 current to the actuator as a function of at least the current level and the transducer  
12 motion constraints to complete the seek operation at the expiration of the seek time.  
13

14           68.    The storage device of claim 54, wherein the seek time constraint  
15 corresponding to each seek operation is based on the relative rotational phase from the  
16 end of the starting segment to the start of the destination segment for the seek  
17 operation.  
18

19           69.    The storage device of claim 54, wherein the seek time constraint  
20 corresponding to each seek operation is based on a rotation time from the end of the  
21 starting segment to the start of the destination segment, wherein the rotation time is a  
22 function of the relative rotational phase from the end of the starting segment to the start  
23 of the destination segment for the seek operation.  
24

25           70.    The storage device of claim 53 wherein for each segment in the set: said  
26 relative start, end and rotational phases of that segment to respective ones of all other  
27 segments in the set are predetermined.  
28




1           71.    The storage device of claim 53, further comprising means for receiving  
2 one or more incoming data streams and partitioning each incoming data stream into  
3 data segments for storage in the storage device.

4  
5           72.    The storage device of claim 71, further comprising means for combining  
6 data segments read from the storage device to reformulate one or more output data  
7 streams.

**Abstract**

A method for storing at least one set of data segments in a data storage system including data storage media having at least one rotatable recording surface, where the data segments are stored in concentric data tracks, each recorded data segment including a start, an end and a rotational phase from that data segment to each of the respective ones of all other data segments in the set, wherein the data segments are recorded with coherent relative rotational phases. For each data segment in the set the relative rotational phases of that data segment to respective ones of all other data segments in the set are predetermined. Further, the rotational phases from a data segment to respective ones of all other data segments in the set comprise the rotational phases from the end of that data segment to the start of the respective ones of all other data segments in the set, and have one of a limited number of predetermined values. The data segments are recorded so as to obtain a nearly constant data storage transfer rate when reading the data from the data storage media. The data segments read from the storage media can be combined to reformulate one or more data streams from the data segments. The data storage system can be a component of a computer system. The data storage system can be also be a component of an audio video storage server. In that case, the data segments comprise audio visual data and the method of the present invention is used to store and retrieve isochronous Audio-Video (AV) content for consumer electronics applications.

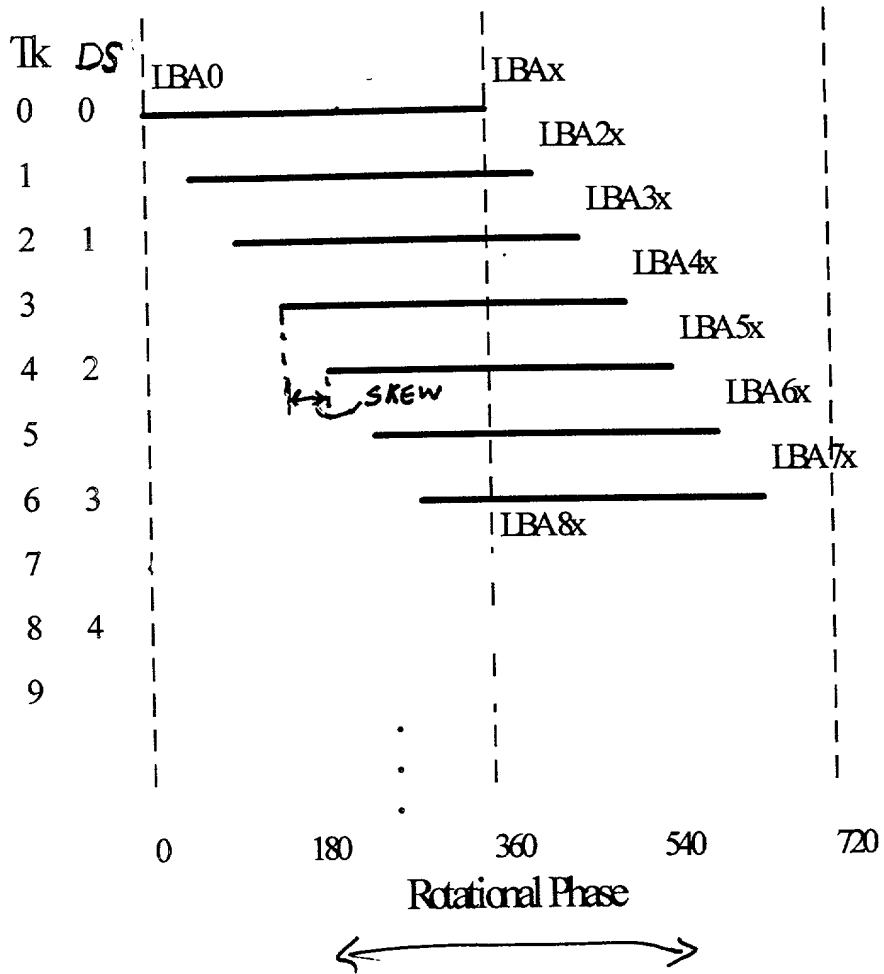

PRIOR ART

FIG. 1

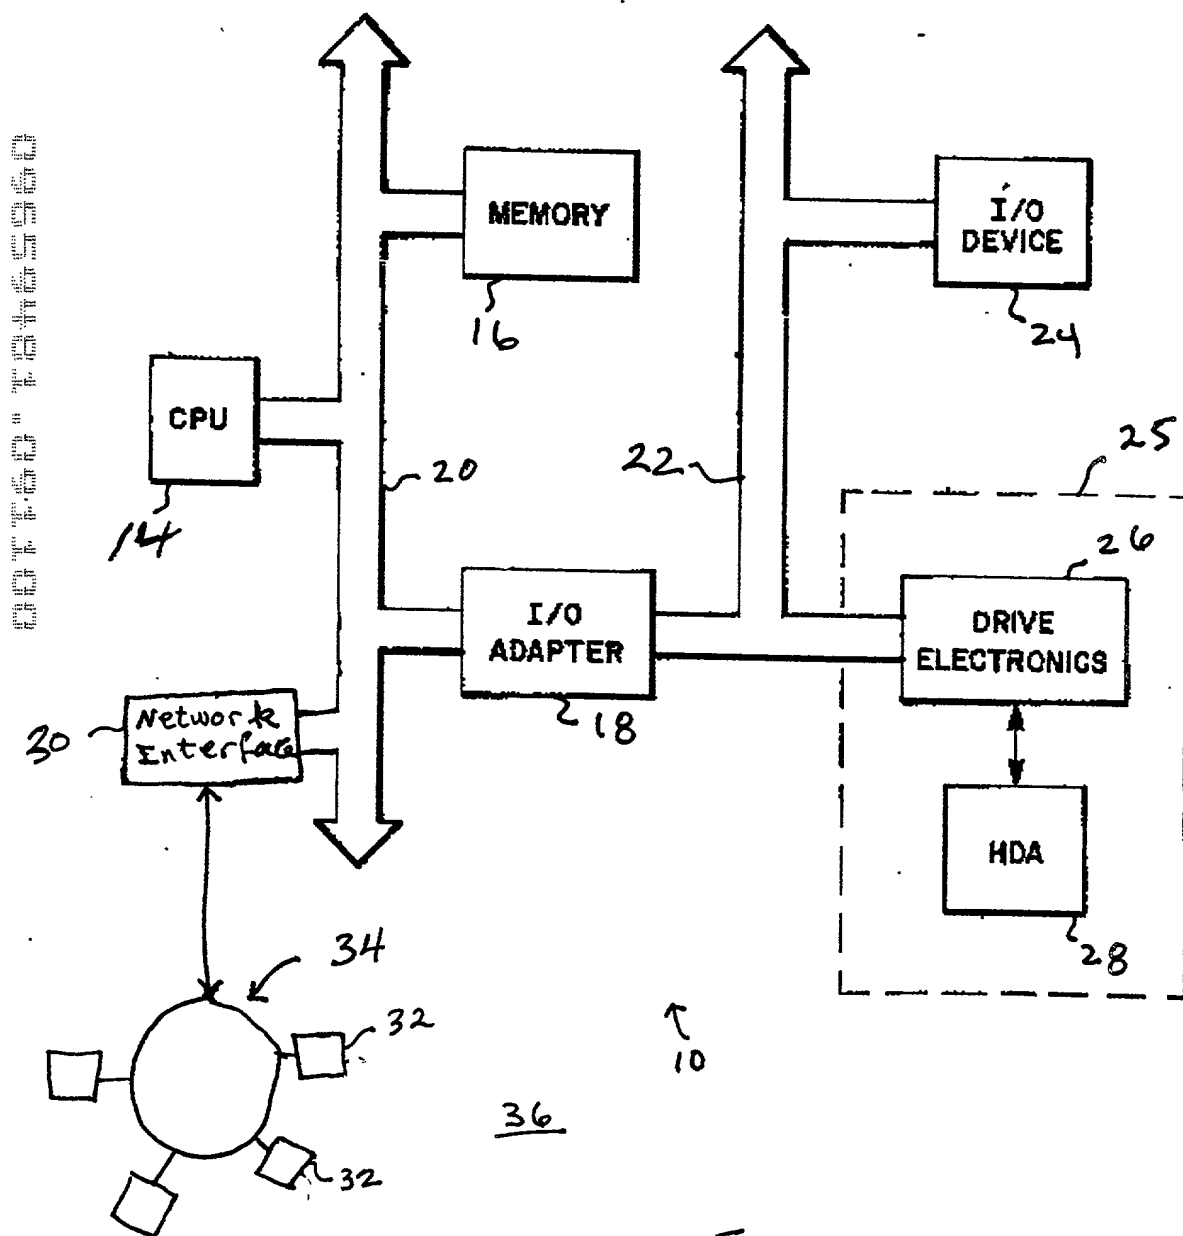


FIG. 2

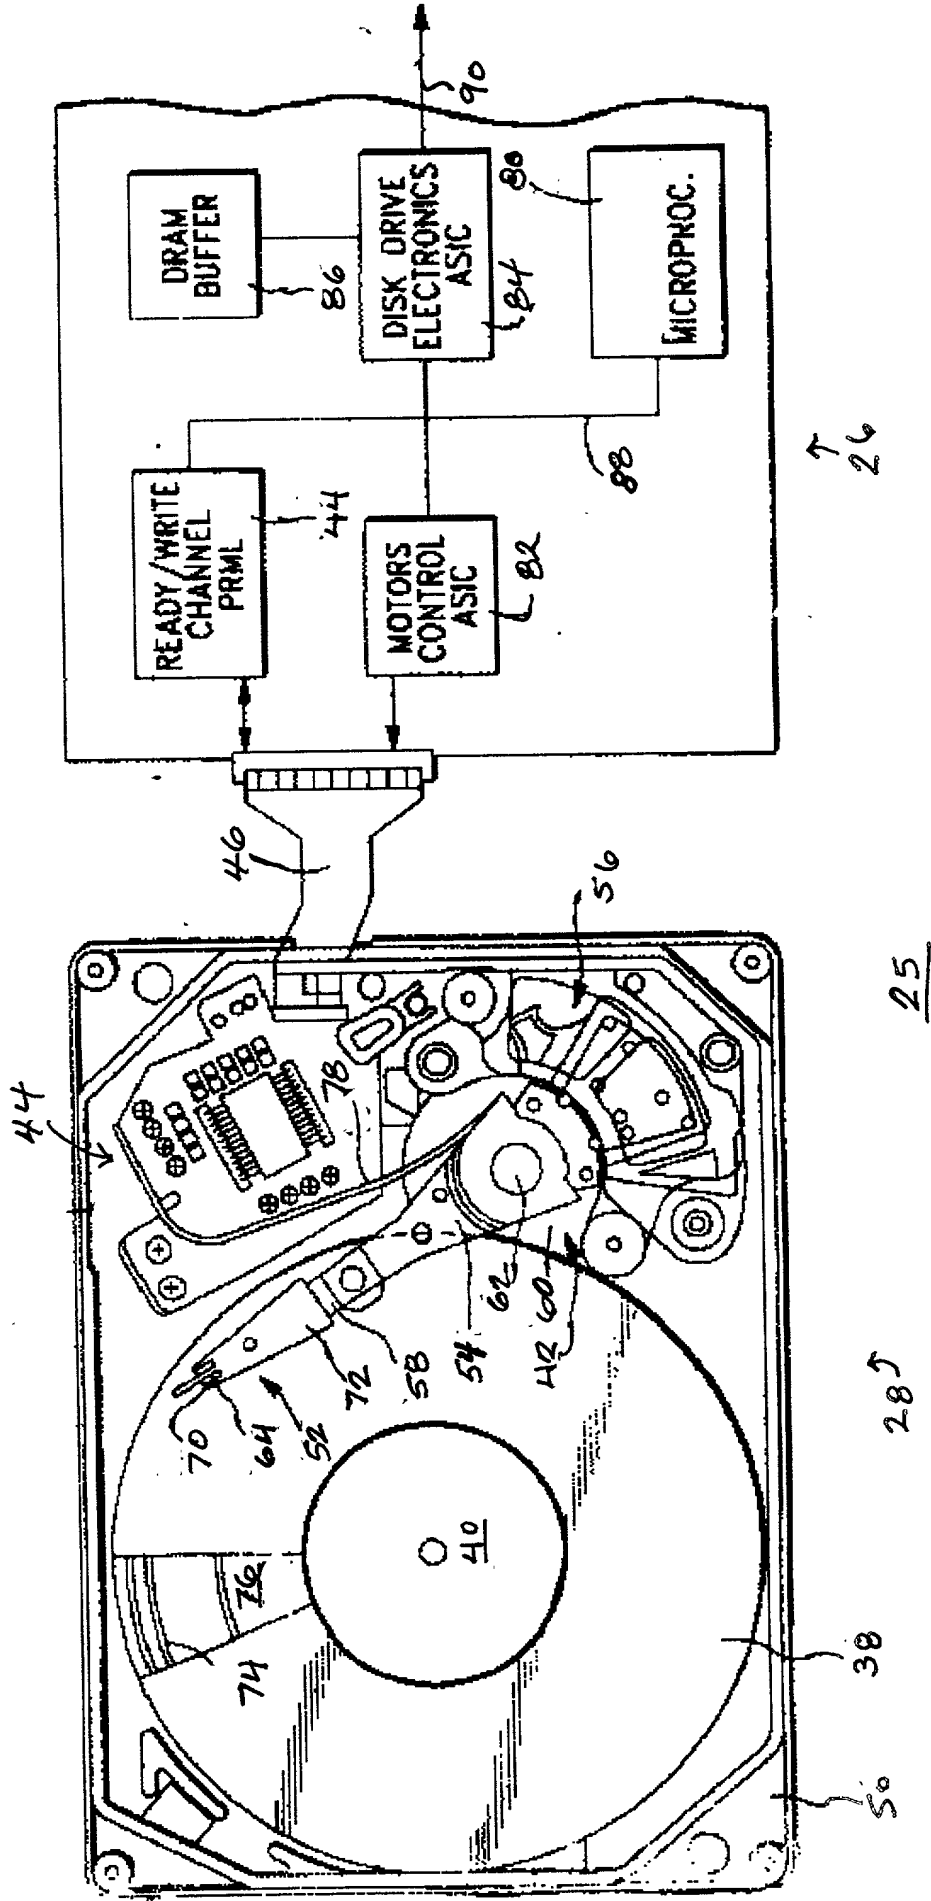


FIG. 3

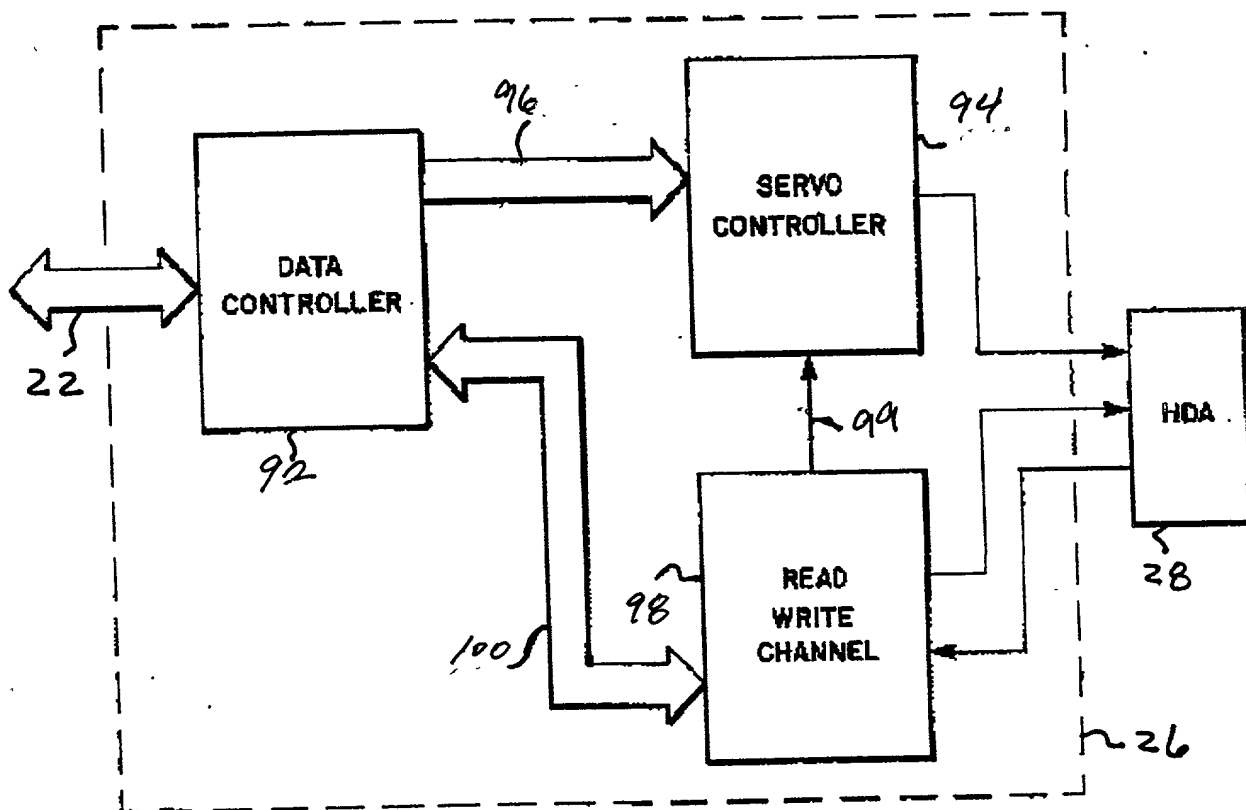


FIG. 4

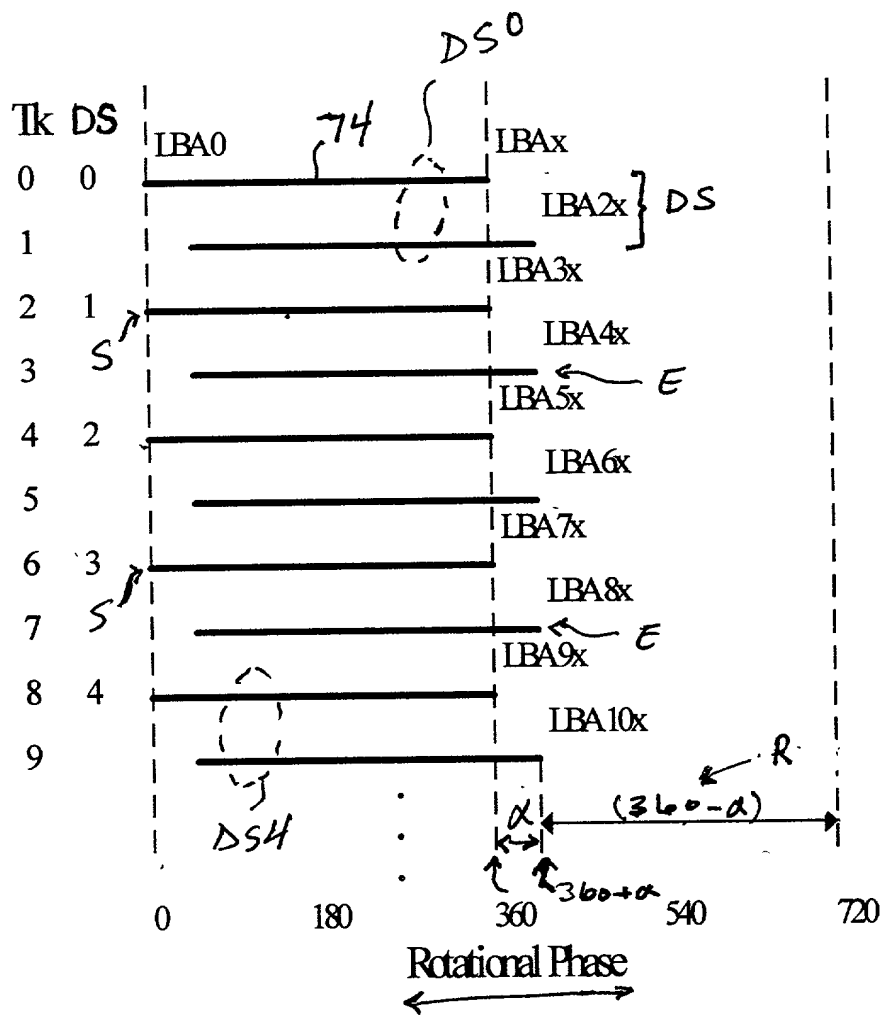
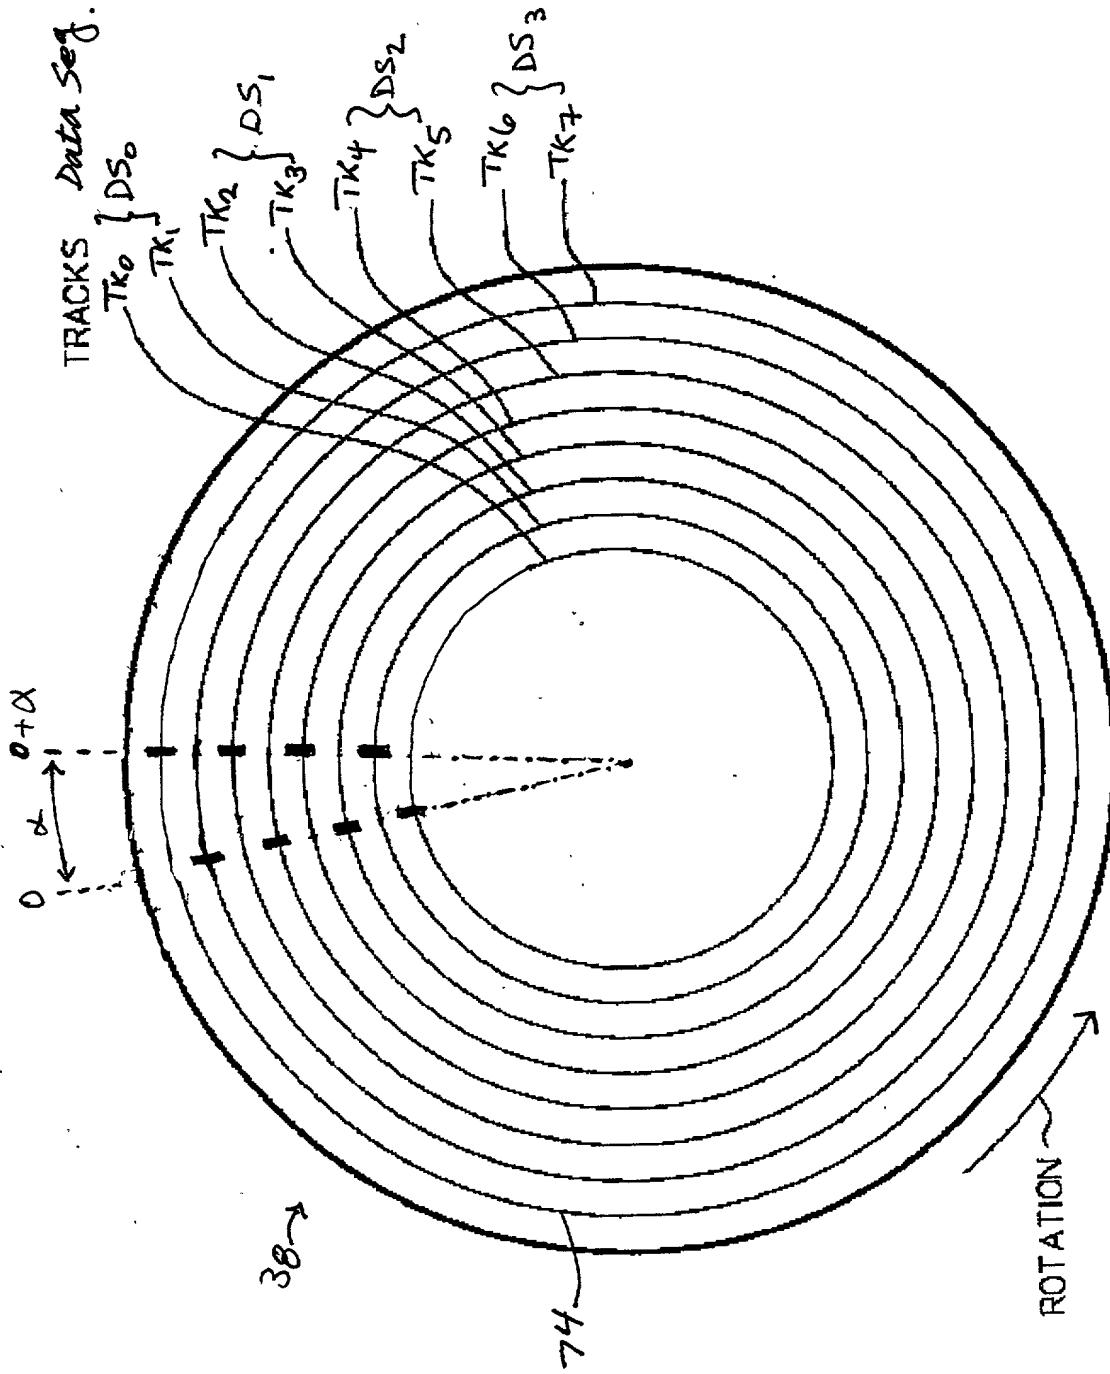
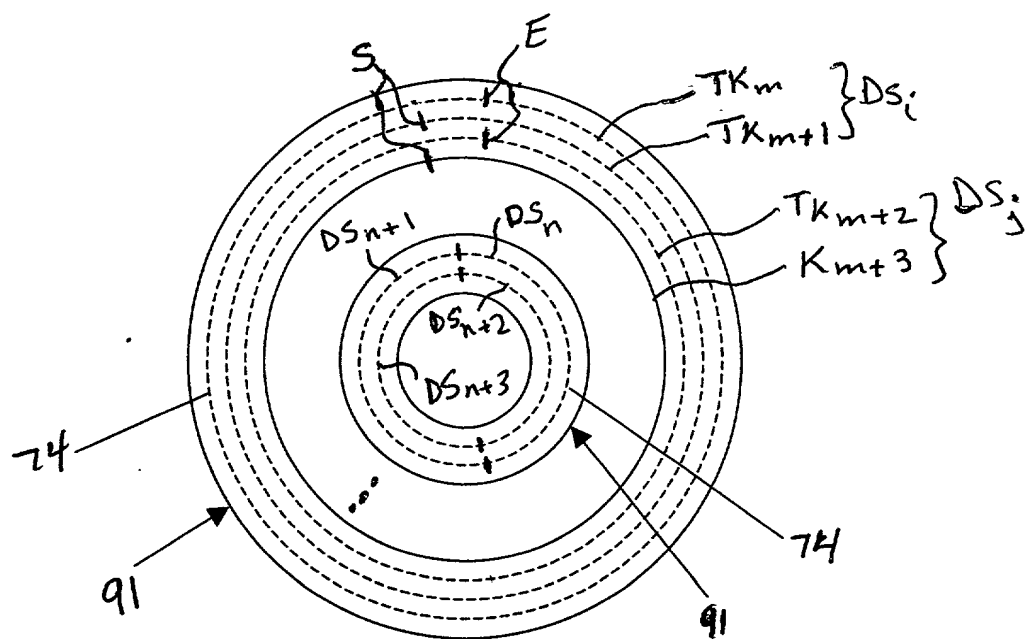


FIG. 5



**FIG. 6A**





**FIG. 6B**

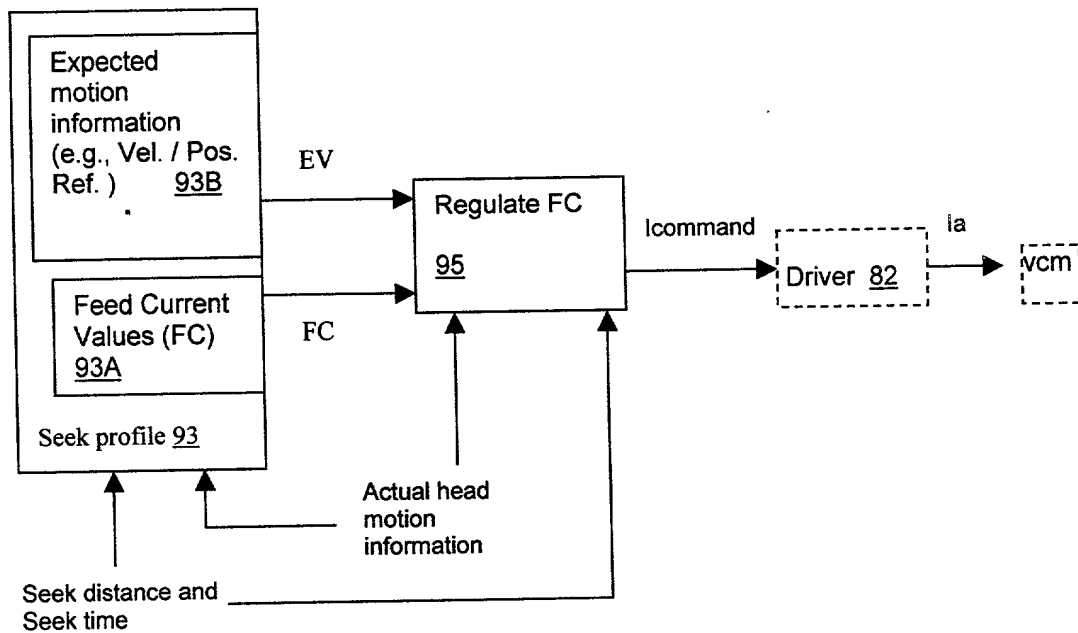
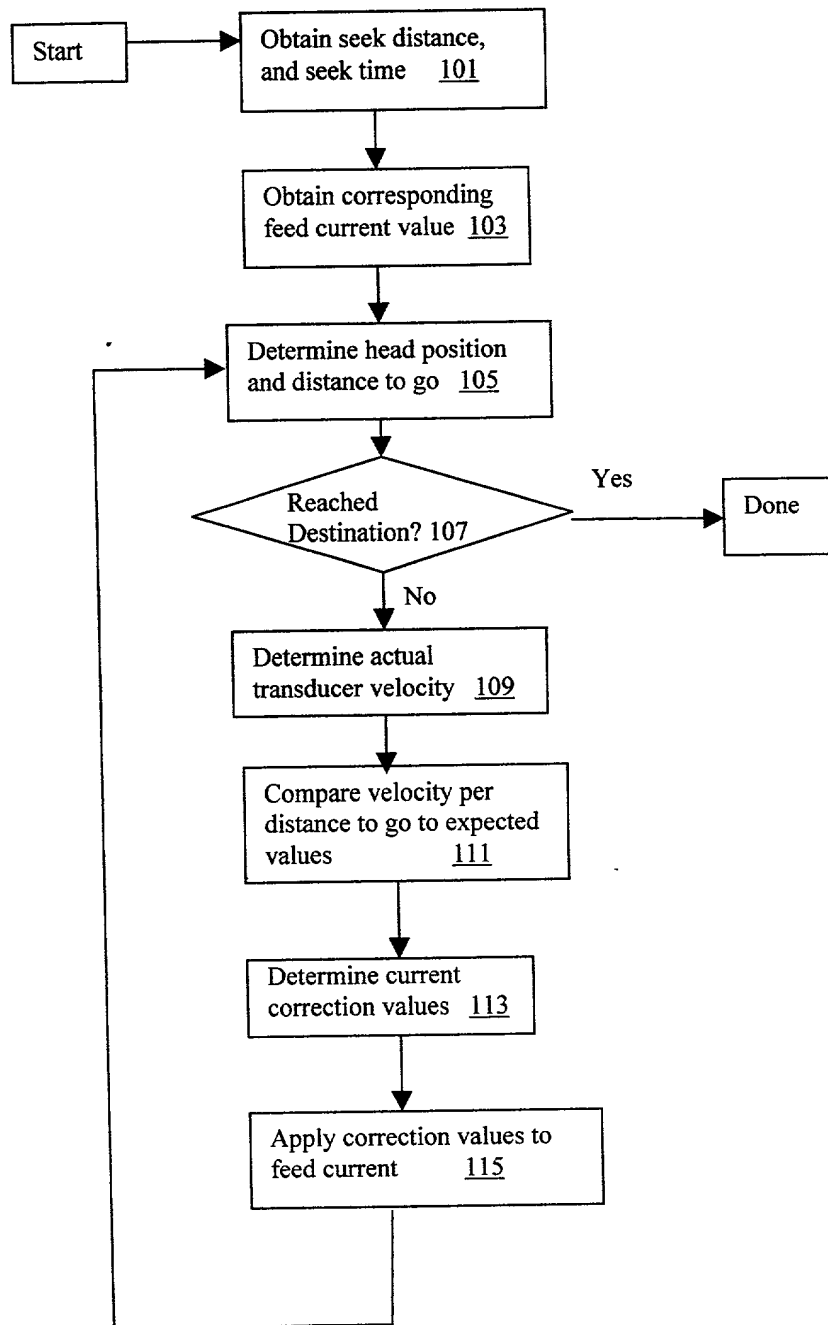


FIG. 7A

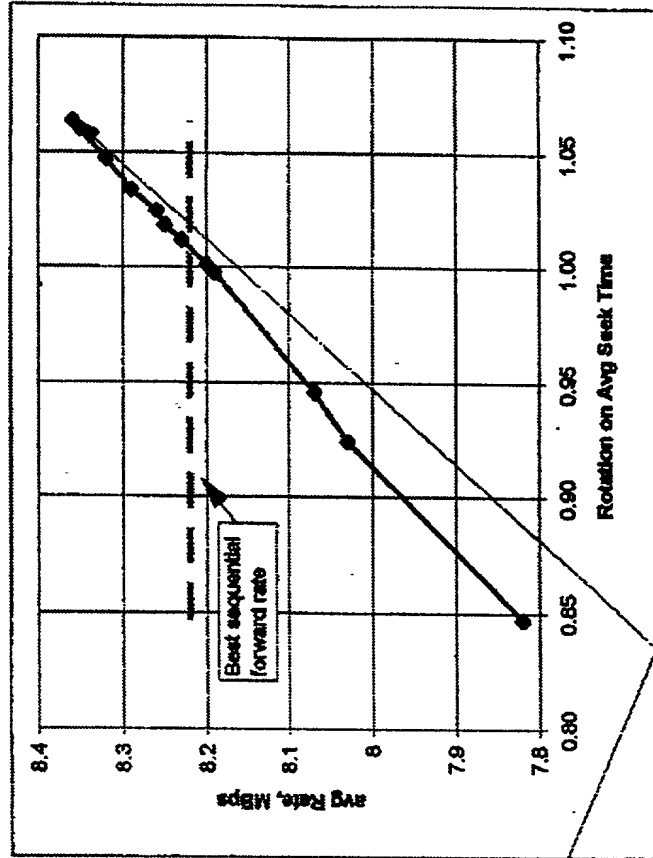


**FIG. 7B**

# Summary of various solutions - 2 Tracks Per DS

8.4 Avg Seek time  
11 Trev


Skew modulus	Skew factor	Skew time	Rotation Phase	Rotation Time, msec	Rotation on Avg Seek Time	avg Rate, MBps
17	6	3.88	0.647	7.12	0.85	7.82
17	5	3.24	0.706	7.76	0.92	8.03
18	5	3.08	0.722	7.94	0.95	8.07
21	5	2.62	0.762	8.38	1.00	8.19
17	4	2.59	0.765	8.41	1.00	8.2
22	5	2.50	0.773	8.50	1.01	8.23
18	4	2.44	0.778	8.56	1.02	8.25
23	5	2.39	0.783	8.61	1.02	8.26
19	4	2.32	0.789	8.68	1.03	8.29
20	4	2.20	0.800	8.80	1.05	8.32
21	4	2.10	0.810	8.90	1.06	8.35
32	6	2.06	0.813	8.94	1.06	8.36
64	12	2.06	0.813	8.94	1.06	
128	24	2.06	0.813	8.94	1.06	
256	48	2.06	0.813	8.94	1.06	
512	96	2.06	0.813	8.94	1.06	
1024	191	2.05	0.813	8.95	1.07	



1.7% Improvement over best sequential rate  
7% increase over this range

FIG. 8A

FIG. 8B

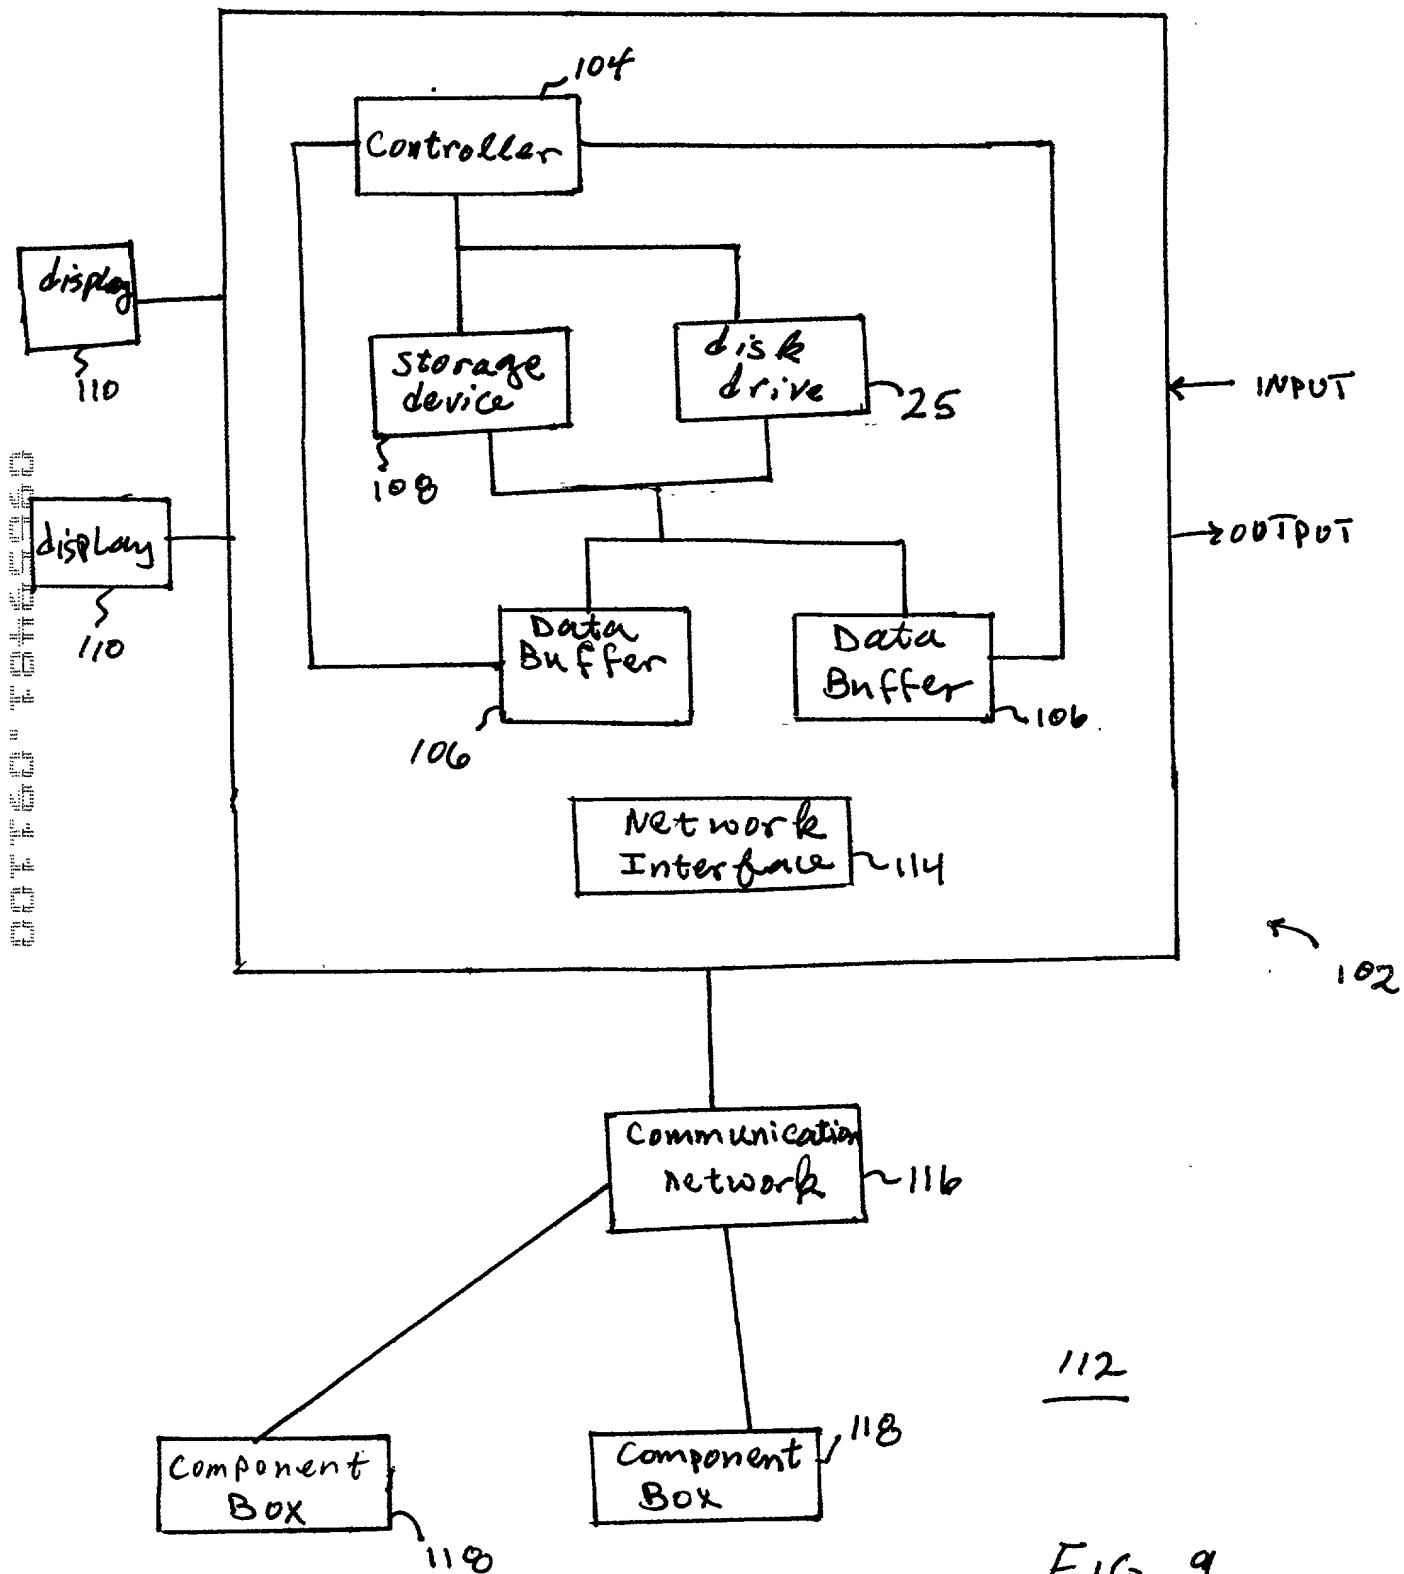

112

FIG. 9

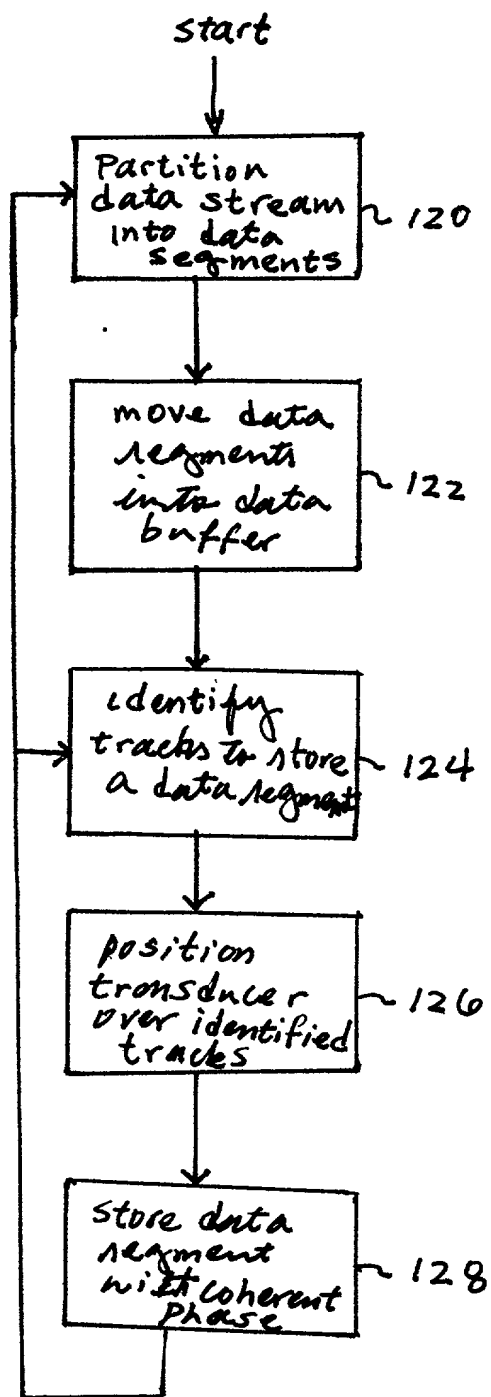


FIG. 10




FIG. 11

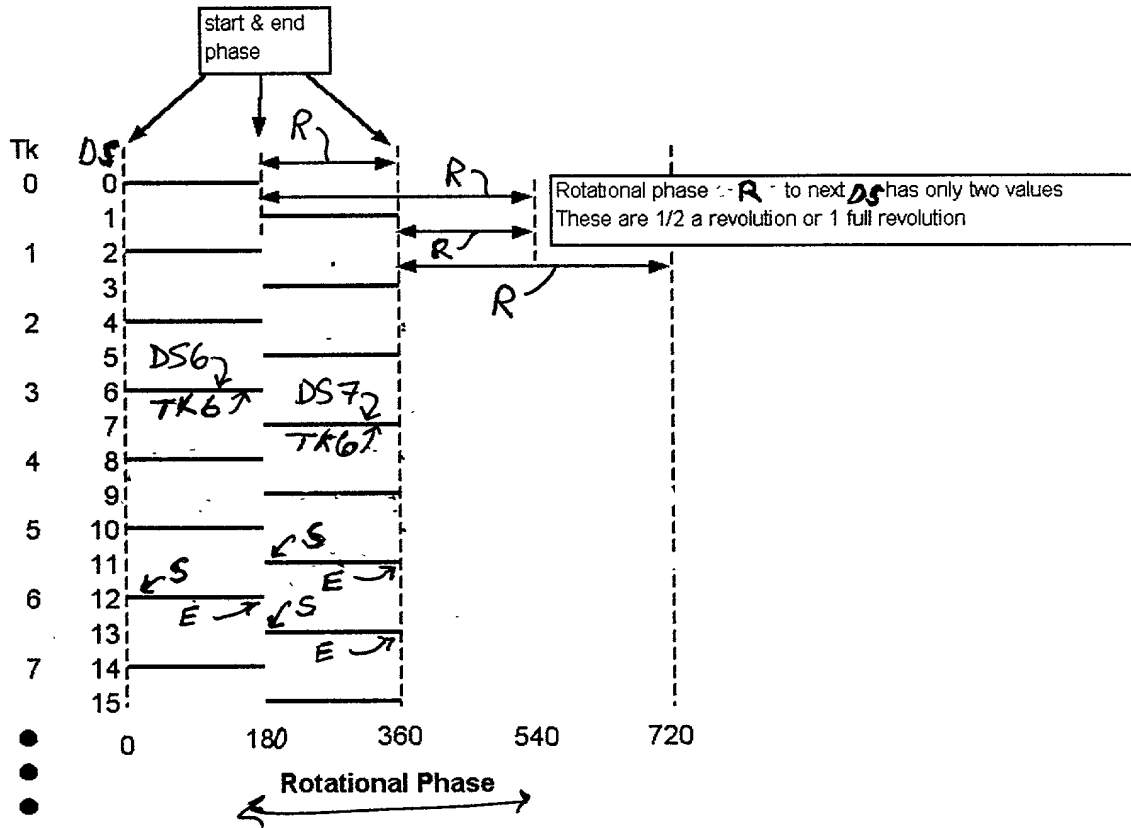


FIG. 12A

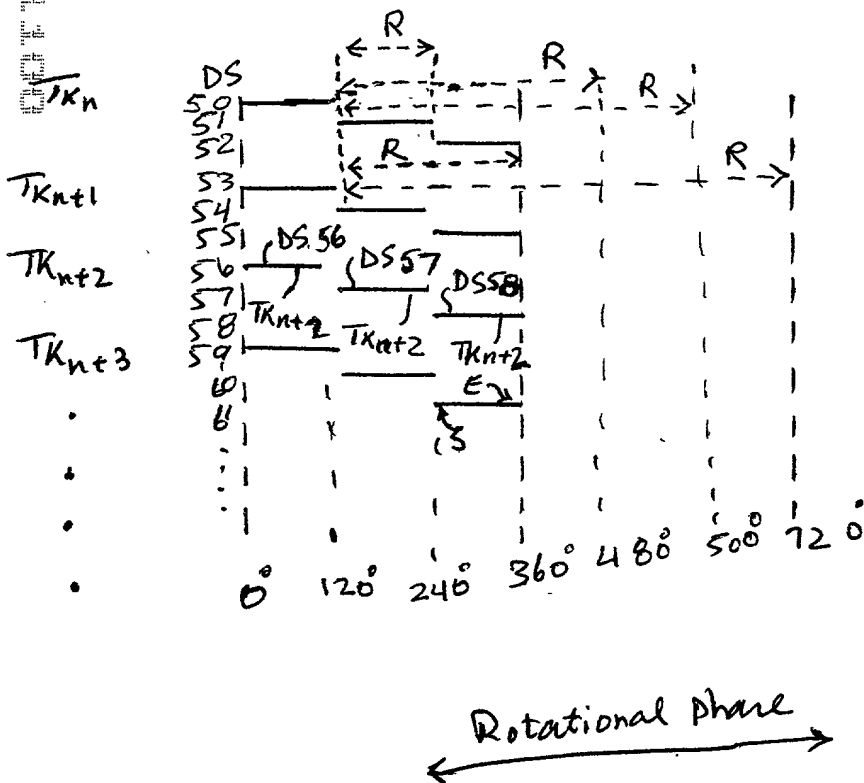


FIG. 12B



## DECLARATION FOR PATENT APPLICATION

As a below named inventor, we hereby declare that:

Our residence, post office address and citizenship are as stated below next to our names.

We believe that we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled **COHERENT PHASE DATA SEGMENT LAYOUT IN DATA STORAGE SYSTEMS**, the specification of which

  X   is attached hereto.

       was filed on                      as Application Serial No.                     ,  
and was amended by on                     .

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

We hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Applications

Priority Claimed

NONE

\_\_\_\_\_

(Number) (Country) (Day/Month/Year Filed) Yes No

(Number) (Country) (Day/Month/Year Filed) Yes No

We hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below:

Provisional Application No.

Filing Date

We hereby claim the benefit under Title 35, United States Code, Section 120 of any United States applications(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

NOT APPLICABLE

(Application Serial No.)

(Filing Date)

(Status)

(Application Serial No.)

(Filing Date)

(Status)

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

On behalf of Quantum Corporation, Assignee of our entire right, title and interest, we hereby appoint the following attorney(s) and/or agent(s) with full power of substitution to act exclusively for Quantum Corporation to prosecute this application and transact all business in the Patent and Trademark Office connected therewith; JONATHAN B. PENN, Registration No. 32,587, HENRY J. GROTH, Registration No. 39,696. Please address all correspondence and communications to:

HENRY J. GROTH  
Patent Law Manager  
Quantum Corporation  
500 McCarthy Blvd.  
Milpitas, CA 95035  
Telephone (408) 894-5425

All telephone calls should be directed to HENRY J. GROTH, telephone number (408) 894-5425.

Full Name of Inventor: DONALD ADAMS

Inventor's Signature: 


Date: 8/24/00

Inventor's Residence: 2474 Pomino Way, Pleasanton, CA 94566

Citizenship: USA

Post Office Address: Same as residence address above.

Full Name of Inventor: TAIN-SHAIN LEE

Inventor's Signature: 


Date: 9/7/00

Inventor's Residence 1801 Daltry Way, San Jose, CA 95132

Citizenship: USA

Post Office Address: Same as residence address above.

Full Name of Inventor: AHMED AL-MEHDI

Inventor's Signature: 

Date: 08-24-2000

Inventor's Residence 36773 Reynolds Drive, Fremont, CA 94536

Citizenship: USA

Post Office Address: Same as residence address above.